

Flash

# SCIENTIFIC AMERICAN

A WEEKLY JOURNAL OF PRACTICAL INFORMATION, ART, SCIENCE, MECHANICS, CHEMISTRY, AND MANUFACTURES.

Vol. XXXIII.—No. 26. [NEW SERIES.] NEW YORK, DECEMBER 25, 1875. [\$3.20 per Annum. (POSTAGE PREPAID.)]

## GRAND CENTRAL DEPOT SIGNAL SYSTEM.

Three great railroads have their terminal in the Grand Central Depot, located on 42d street, in New York city. An illustration and description of this immense structure have already appeared in these columns. With the exception of the interval between 1:10 and 3:40 in the morning, and of fifty minutes at noon, no period of fifteen minutes elapses in which some train does not depart or arrive via the Harlem, the Hudson River, or the New York, Hartford and New Haven road. One hundred and eighteen regular, and from ten to fifteen extra, trains daily pass, in one direction or the other over the tracks on the underground road between 53d street and Harlem bridge, a distance of nearly four and a half miles. Barely two minutes sometimes intervenes between the departure of one train and the incoming of another, and three trains often start at intervals of five minutes apart.

It is obvious that, in order to prevent confusion and accident, the movements of each and every one of these trains, while traveling between the points named, must be governed with absolute certainty. Add to this that crowd after crowd of passengers must be admitted from the reception room to the outgoing cars at exactly the proper time, and the checking of their baggage must be stopped in time to insure its despatch by the proper trains; and the reader will have formed some faint idea of the perfect system which must exist for the management of the machinery of the great depot and its approaches. To indicate the salient points of this system is the object of the present article; and in the accompanying illustrations are represented such devices pertaining thereto as are interesting, both in respect to ingenuity of design and mechanical novelty.

The system as a whole may be divided into three really distinct though closely interwoven parts: first, the means whereby trains are received and despatched, and also the internal operations of the depot controlled; second, the electro-magnetic way signals; and third, the novel interlocking apparatus for switches and crossings. For the sake of clearness, we shall begin with the first, mentioning merely results, and leaving the explanation of the same to consideration in connection with the other two topics.

Located far up on the north wall of the depot, the view from its broad window extending over the intricate network of rails into which the various tracks diverge, is a small cabin, the interior appearance of which the reader has before him in the largest of the engravings herewith given, Fig. 1. On the wall hang signal indicators and bells, time tables, and a huge clock. On the table before the single occupant are a telegraph instrument, a record book, and three rows of ivory buttons, twenty in all. This is the dispatcher's office, and here, by pressing the buttons or manipulating the telegraph key, he controls the movement of every train going or coming, the buttons, through simple electric bells, governing everything near and about the depot, the key transmitting instructions to far-off points. By way of illustration, we suppose that one train is to start at 4:30, and that another will arrive at 4:31 o'clock. It is now just 4:10, the passengers are congregated in the waiting room, the cars are in place; and the engine, with steam up, is standing outside, not

yet attached. The dispatcher touches a button, the sound of a bell is heard, the heavy doors of the waiting room fly open, and the passengers crowd upon the cars. Fifteen minutes elapse: the operator presses another button, a gong strikes in the baggage room, and the checking is stopped. Belated individuals who wish to depart by that train must go *minus* their baggage. Now the operator watches the clock closely; three minutes pass, and then a sharp peal rings out from a bell close beside him. The minute hand points to 4:28, and the incoming train has reached 64th street and is signaling its own approach. The sound continues for half a minute, then stops; the train is at 55th street, and the finger of the dispatcher at once presses another button. If we were on the arriving locomotive, we should see a green disk

arriving train now rushes in, its passengers disembark, and at the sound of the bell from the dispatcher, a locomotive kept for the purpose, couples on and drags the empty cars out of the depot.

We have accounted for twenty-one minutes, during which one train has left and one arrived; the reader may imagine the celerity and certainty of the work when we add that, within the fifteen minutes which we recently spent in the dispatcher's cabin, three trains on three different roads were started and three received, all at different times and without the slightest confusion.

The electric bells about the depot being of simple and well known construction, and sounded by the establishing of the current when the buttons are pressed, need no elucidation;

and therefore the points remaining which require explanation are those relative to the movement of the flying switch and danger signals by the dispatcher, and also as regards the indicator which announced the passage of the train over the crossing. This brings us to the second branch of our subject.

The electro-magnetic way signals and their operations are represented in Fig. 3. The signal is a disk made of metal, painted red, and inclosing a circle of red glass. This is supported on a shaft, shown upright (it may be horizontal, or in fact in any position), which, by the gearing and weight shown at A, is rotated through the unwinding of the cord wound about the barrel of the larger gear wheel. The disk may be turned to present its full face or only its edge in any direction, in one case showing its full color and signaling "danger," in the other being almost invisible and allowing the aperture of the frame or box in which it is placed to appear empty, meaning the reverse, or "clear road." It is obvious that, in order to govern the disk so that it must always appear

in one of the two positions—that is, full face or on edge—mechanism is required which will allow it to be rotated by the weight exactly one quarter revolution at a time, and no more nor less. This apparatus is found in the simple electro-magnetic device shown. Just below the disk, and rigidly secured to the shaft, are four arms having downward end projections, B. Also fixed on the shaft and further down is a cam, carrying beneath it two short vertical pins. The latter, as the shaft revolves, strike certain leaf springs, which will be seen on the circular stage, C, which is located just above the frame which carries the electro-magnet, D. The armature, E, of the magnet is hinged at one side, and so placed that, when not attracted by the magnet, and consequently held outward by a suitable spring, the projections, B, strike against it as shown in the engraving, so holding the disk stationary. The construction is such, however, that when the circuit is closed by any means, through one of the springs on the circular stage, C, and the pin on the cam of the disk shaft, then the magnet will become active, the armature be drawn in, and the projection freed, when of course the action of the weight will revolve the disk. But as the latter revolves, the pin on the cam will pass clear of the spring on the stage; the current will then be broken, and the armature will fly back in time to intercept the next projection, B, preventing further movement of the disk, which

(Continued on page 463.)



GRAND CENTRAL DEPOT.—TRAIN DESPATCHER'S OFFICE.

before us, or at night the flash of a green light, meaning that everything is ready for the flying switch just outside the depot, by which the engine is to clear itself from the train, the cars entering the depot by their own momentum. Now it is 4:20; down goes another button; a bell on a post beside the locomotive waiting outside rings for the engineer to back in and couple on. Hardly ten seconds elapse before a sharp "ting" calls the operator's attention to the fact that the pointer arm of the indicator on the wall has swung over from "clear" to "block." The arriving train is on the 53d street crossing. The clock says 4:30; again a button is pressed, the doors of the waiting room are slammed shut, there is a few seconds' delay for the tardy ones on the platforms to board the cars, and then the train moves slowly out of the depot. The indicator pointer still shows "block," and if the outgoing train continues its course a disastrous meeting on the crossing may result. The dispatcher remains passive, however, for he knows that the signal between that train and the crossing is normally at "danger," and that the engineer will certainly come to a stop, and wait until the red disk is turned. The delay is but for a second, for the indicator bell almost instantly sounds again, the arm swings over to "clear," and the proper button is immediately touched. A distant cloud of steam can be seen for a moment, and the outgoing train is off again. Pressing another button, the operator restores the danger signal. The



# Scientific American.

MUNN & CO., Editors and Proprietors.

PUBLISHED WEEKLY AT  
NO. 37 PARK ROW, NEW YORK.

O. D. MUNN.

A. E. BEACH.

## TERMS.

One copy, one year, postage included.....\$3 30  
One copy, six months, postage included..... 1 60

## Club Rates.

Ten copies, one year, each \$2 70, postage included.....\$27 00  
Over ten copies, same rate each, postage included..... 2 70

By the new law, postage is payable in advance by the publishers, and the subscriber then receives the paper free of charge.

NOTE.—Persons subscribing will please to give their full names, and Post Office and State address, plainly written, and also state at which time they wish their subscriptions to commence, otherwise the paper will be sent from the receipt of the order. When requested, the numbers can be supplied from January 1st, when the volume commenced. In case of changing residence, state former address, as well as give the new one. No changes can be made unless the former address is given.

VOLUME XXXIII, No. 26. [NEW SERIES] Thirtieth Year.

NEW YORK, SATURDAY, DECEMBER 25, 1875.

## Contents.

(Illustrated articles are marked with an asterisk.)

Answers to correspondents.....	400
Beer, drinking.....	400
Stacking for patterns (5).....	401
Bleaching horsehair (4).....	401
Breakwater, the Manors.....	401
Bronides of camphor (13).....	401
Business and personal.....	401
Cementing leather to iron, etc. (3).....	401
Centrifugal force (16).....	401
Corner lots.....	401
Dreams (18).....	401
Drilling chilled iron (7).....	401
Electric force, the new phase of.....	401
Electricity, another form of.....	401
Engines, two new street.....	401
Filter, a charcoal.....	401
Filters and liquid meters.....	401
Filters, domestic.....	401
Filters, laboratory.....	401
Filters, reversible.....	401
Fish flour.....	401
Flouring mill, the largest.....	401
Galley support, printer's.....	401
Gases, volume and pressure of.....	401
Gears, compound (30).....	401
Grand Central depot signals.....	401
Greenhouses and hothouses.....	401
Guns, recoil check for.....	401
Hydraulic ram, the.....	401
Index to volume XXXIII.....	401
Life, the origin of.....	401
Lighthouses, illumination for.....	401
Lightning rod ignorance, loss from.....	401
Liquid meters.....	401
Marking out guide bars.....	401
Metal, white (4).....	401
Meter, liquid mechanical.....	401
Meter, pulsating.....	401
Meter, spirit.....	401
Meter, the Siemens spirit.....	401
Meter, water.....	401
Mines, coal, light in.....	401
Newton's experiments.....	401
Patents, American and foreign.....	401
Patents, official list of.....	401
Phosphorus light (12).....	401
Plant vases for decoration.....	401
Polygon, area of a (17).....	401
Practical mechanism—No. 34.....	401
Quinine, doses of (9).....	401
Rosin, black (3).....	401
Shaping machine, double.....	401
Signals, Grand Central depot.....	401
Silk-spinning machinery.....	401
Skilled labor.....	401
Stove patterns, waxing (19).....	401
Strains on a rope (15).....	401
Telegraph poles, street.....	401
Thermometer, mercury in a (1).....	401
Timely suggestions.....	401
Vinegar, testing.....	401
Weight on an axle (14).....	401
Weights and pulleys (18).....	401
Welding iron and steel (6).....	401
Wheelwright's machine.....	401
Wood boiled in oil (10).....	401

## THE END.

With this issue, the time for which a large number of our subscribers have prepaid expires. We hope that all will renew their subscriptions, and bring some of their friends and neighbors with them. The safest way to remit is by Postal Order, Express, Bank check to order of Munn & Co., or Registered Letter. But little risk is incurred in sending bank bills by mail, although the above-named methods are safest. Beautiful Chrome Name Lists and Special Prospectuses and Circulars sent on application. For terms, see page 410 of this paper.

## THE ORIGIN OF LIFE.

Whether the line of experimental investigation adopted by Bastian and other students of spontaneous generation will ever lead to a convincing demonstration of the origin of life *de novo* is very doubtful. However fine the apparatus employed, however exacting the precautions against the slipping in of germs from without or their escape from destruction within, the ingenuity of the opponents of the theory will always be able to discover a possible broken link in the chain of evidence.

Like many another point of scientific controversy, this, we suspect, will be flanked rather than carried by direct assault. As in the case of magic and witchcraft—belief in which died a natural death in the minds of intelligent people, superseded by more rational views of man and Nature, but never logically demolished—so, we are inclined to think, the mystery of life's beginning will undergo a natural solution.

Those who hold to the dogma of "no life without antecedent life" are compelled to assume, at some point in the history of the Universe, the occurrence of nothing less than a miracle—that is to say, a phenomenon unknown to Science, and logically unapproachable from a truly scientific point of view.

Life must have begun somewhere, once at least. If it was not a natural product of material conditions, its beginning must have marked a positive breach in that causal connection of events without which Science would be impossible. The weight of all experience is against assumption of such a breach of continuity: in other words, against a miraculous origin of life. On the other hand the weight of experience is equally against the assumption of a material condition absolutely unique in character. If life arose once in consequence of material conditions, Science affords no justification for the assertion that such conditions may not be repeated, possibly in our laboratories.

This is substantially the position taken by Mr. Proctor in the latest expressions of his views, and by Professor Tyndall in his latest discussion of matter and life; and such appears to be the growing conviction of those of the present generation of scientists most pervaded by the spirit of scientific progress. Says Professor Tyndall: "The conclusion of Science which recognizes unbroken casual connection between the past and the present would undoubtedly be that the molten earth contained within it elements of life, which

grouped themselves into their present forms as the planet cooled." The context shows that by "elements of life," Professor Tyndall does not mean entities but possibilities of molecular condition by which the phenomena of life were to be evolved in the natural course of events, not by the miraculous addition of a new force but by means of the forces already in play.

"The difficulty and reluctance encountered by this conception," he continues, "arise solely from the fact that the theologic conception obtained a prior footing in the human mind. Did the latter depend upon reasoning alone, it could not hold its ground for an hour against its rival. \* \* \* Were not man's origin implicated, we should accept without a murmur the derivation of animal and vegetable life from what we call inorganic nature. The conclusion of pure intellect points this way and no other."

Admitting the natural origin of life, the question arises: When did life begin?

One branch of the evolution school delights to trace the existing forms of life back to some primordial germ: through changing conditions, the tendency of living things to vary from generation to generation, the survival of the fittest, etc., the one has become many. But there is from this point of view no satisfactory accounting for the persistence of so many primitive forms, or for the present preponderance of undeveloped forms. Nor is there any sufficient reason given for assuming that life began once, and once only, in the distant past.

A more logical position is occupied by those who favor the hypothesis that the material conditions under which life originates are common conditions; consequently that the low forms of life which swarm in the waters of today are low because of their recentness. If they resemble long past fossil forms, they do so from some natural law of evolution, rather than in consequence of direct descent. From this point of view there may be no closer kinship between humanity and existing brutes than arises from a common relationship to Mother Earth. Man may be cousin to the ape; but that does not necessarily follow from the theory of evolution, as the Science of the future will regard it.

## HEAVY LOSS FROM LIGHTNING ROD IGNORANCE.

On the 6th of September last the large woolen mill of Robert Fitton, Esq., at Cavendish, Vt., was struck by lightning and consumed, with a loss of \$100,000; 130 persons were thrown out of employment. The mill was 45 feet wide, 106 feet long, 4 stories high. It had a flat, gravel-covered roof, and around the eaves ran a 4 inch iron lightning rod with vertical points every four feet. From the eaves rod six branch rods extended to the ground, five of which terminated at a depth of three feet below the surface, and the other was carried thirty feet underground to the bank of a pond. These particulars have been mostly furnished to us by the proprietor of the mill. The Boston *Commercial Bulletin* states that the insurance underwriters regarded the mill as particularly well protected against lightning, as there was upon it an unusual array of rods, which had been overhauled and put in good order during the year. Yet the mill was struck, the flames flashing instantaneously through the spinning room. The *Bulletin* thinks that the loss of this mill shows what value there is in lightning rods. The insurance companies had to pay \$84,000 in settlement.

The principal comment we have to offer is that the burning of the Cavendish mill was a glaring example of the results of lightning rod ignorance. It would be difficult to find a more sagacious or enterprising body of business men than are the presidents, directors, secretaries, inspectors, and agents of our fire insurance companies. It would naturally be supposed that, in a matter which so directly affects their pecuniary interests as fire losses from lightning, they would take great pains to acquire knowledge concerning the means of safety, and promulgate the strictest requirements among insurers. But they appear to be lacking in this respect, although year after year the records of annual losses of millions in property, by fire caused by lightning, are forced upon their attention, and large sums of money in damages are drawn from their coffers. By consulting the naval records they may easily satisfy themselves that, while formerly the losses of ships and lives by lightning were enormous, the losses immediately ceased when rods were introduced upon vessels; and at the present day we seldom or never hear of a serious injury to or loss of life from lightning, upon a properly rodged ship. The same appliance that protects a wooden vessel at sea will protect a wooden building on land, and we will here briefly describe this appliance, though in doing so we only repeat what we have oftentimes published.

In general terms, a ship's lightning rod consists of a rope or rod of copper or iron wire, lashed to the rigging and extended from the sky pole down so as to connect at any suitable place with the copper bottom, which is in contact with the sea. The rod thus has for its terminal a very large surface of conducting material, larger in fact than the deck surface of the vessel, and the lightning passes off harmlessly.

The golden rule of safety for rodged buildings is analogous to the above. The rod must have for its terminal a very large surface of conducting material, placed underground in contact with the earth. Without such a terminal, no rod can be considered safe.

How large should be the conducting surface of the terminal, and of what materials made? The area of conducting surface necessary to ensure safety varies with the nature of the soil. If the ground is always moist, a smaller extent of conducting surface for the bottom of the rod will be safer than if the soil is generally dry.

To meet the contingency of a very dry soil at the driest season of the year, the electrician, Mr. David Brooks, of Philadelphia, recommends that the rod have for its terminal a conducting surface, placed underground, equal in area to that of the roof of the building; if this rule errs, it is probably on the side of safety.

Applying the Brooks rule to the Cavendish mill, the rods should have had for their terminals, underground, 4,770 square feet of conducting material, in contact with the earth, instead of which they only had the beggarly amount of less than thirteen square feet. No wonder that the building was struck.

Of what material should the terminals of lightning rods be composed? Iron or copper plates or pipes are the best material. In all cases where there are underground water pipes, the rods should connect with them. If these are of any considerable extent, nothing more is required. In cases where metal terminals cannot be provided, then good charcoal may be used in quantity sufficient to furnish the required extent of conducting surface. This substance ranks next to the metals in conductivity. It may be placed in a trench leading away from the building, with the rod extended along the center. Full particulars concerning lightning rods, the electrical laws concerning them, the electrician's tests for safety, and the best methods for their construction have been given, many times over, in our back numbers; but we propose to continue the subject from time to time so long as may be necessary. We are confident that, if the insurance companies were each to spend seven dollars and place the SCIENTIFIC AMERICAN and SCIENTIFIC AMERICAN SUPPLEMENT on file in their respective offices during the year 1876, they would derive many most valuable suggestions from our pages, not only concerning the means of safety from lightning, but the prevention of fires of every description: suggestions which, if required to be carried into practice by insurers, would save large sums of money to the companies.

## LIGHT IN COAL MINES.

Two or three years ago the SCIENTIFIC AMERICAN suggested a plan of lighting coal mines from without, so as to do away with miners' lamps, and thereby avoid the explosions of fire damp inseparable from their use. The terrible explosion which occurred on December 6 in a Yorkshire colliery, a colliery said to be worked entirely with safety lamps under very rigid discipline, gives fatal emphasis to the demand for a different mode of illuminating such works.

The experiments described in this paper (page 129, volume XXXI.) amply demonstrate the unsafety of safety lamps in places where blasting is practised, the sound wave generated by a blast driving the flame through the wire mesh of the lamp and firing the explosive air without. However perfect the lamp may be, however carefully managed, the protection it affords is only partial; and explosions are liable to occur so long as they are employed. The safety of the miners demands, therefore, the exclusion of all illuminating flames, wherever fire damp is liable to exist, and the lighting of the mines by luminous radiations incapable of exploding fire-damp.

This could be accomplished very easily, we believe, by the generation of the light without the mine (or else at the foot of a ventilating shaft), and its conveyance through tubes to the points requiring illumination. Beams of concentrated light could be sent to any distance through pipes having reflectors suitably placed at bends and angles, or without reflectors, provided the interior of the pipes were smooth and bright. The cost of such lighting would probably be less than the cost of lamps, and the degree of illumination might easily be such as to flood the mine with the brilliancy of day-light.

Another substitute for treacherous safety lamps might be found in electricity, the lanterns being closed so as to make it impossible for explosions to occur. If the insulation of the conducting wires should prove a serious obstacle, it is quite possible that Mr. Edison's "etheric force" would do the work as well without insulation.

## THE DISCOVERY OF ANOTHER FORM OF ELECTRICITY.

Several years ago, it was accidentally discovered that, when the contact of an electric current which magnetized a large electro-magnet was broken very near one of the poles of the electro-magnet, the spark was so much increased in intensity as to produce a powerful snap, like that of a small pistol; while the breaking of the contact at a distance from the electro-magnet produced by no means such effect. The next thing observed was the drawing of sparks from the iron electro-magnet, or from its armature; but neither of these phenomena led any investigator to search out their origin, or to try to find what further results of the same class could be obtained.

This appears to have been done at last by Mr. Edison, of Newark, well known among electricians for several valuable inventions relating to electric telegraphy. He investigated the nature of the spark which could be obtained from the iron core of the electro-magnet, which, according to his statement, recently published, does not manifest the ordinary properties of electricity. The galvanometer is unmoved, the delicate gold leaf electrometer exhibits no signs of deflection, a Leyden jar is not charged by it, etc. But we consider the conclusion that this manifestation shows the existence of a new force, to be rather hasty.

It is well known that static electricity, which will produce a shock, will not move the galvanometer, and that the current of a large element of a voltaic battery will neither move a gold leaf electrometer, charge a Leyden jar, nor produce a shock. Therefore to say that the phenomena observed at



test new "principles, until now buried in the depths of human ignorance," as some of the reporters of the daily papers have done, is, to say the least, rather premature.

We will here call attention to the fact that at present three principal forms of electricity are known, and they vary so much in their nature that formerly some investigators inclined to consider them as separate forces or fluids. First we have the so-called static electricity, possessing great tension; it is developed on a small scale by friction, and on a large scale by evaporation and induction, as manifested in thunder storms. For this form of electricity, not only all kinds of metals, but water and the human body are good conductors, even the dry skin of the hands forming no obstacle. Secondly, we have the voltaic or galvanic electricity, originated by chemical action, and developed in our galvanic batteries. For this form of electricity, only some metals are good conductors, others poorer, while water and the human body are bad conductors; its effects on the latter cannot be studied without wetting the skin, as the dry skin is a non-conductor of it. This form of electricity is used for telegraphy, while, as is well known, the static electricity (as obtained by friction) is not so useful for this purpose, its great tension causing it to escape too easily. Thirdly, we have the thermo-electricity, discovered in 1820, by Seebeck in Berlin, which differs as much from the galvanic electricity as the latter does from static electricity. For this thermo-electricity, water or the human body is an absolute non-conductor, and a thin metallic wire is but a poor conductor; so that it can scarcely pass through the whole length of the coil of a common galvanometer, and does not act on this instrument, but is powerfully indicated by one made with very thick and short wire, even if the galvanometer consists of one single, heavy, and uninsulated wire, in a coil of one turn or only half a turn.

Now it appears to us that the form of electricity discovered by Mr. Edison, may be:

1. A fourth kind of electricity, requiring as little or less insulation than the thermo-electricity of Seebeck. It is said to pass over the ordinary gas pipe, and can equally well be drawn from several of the chandeliers in a house, or even in other houses, if one of them is connected with the source of the new electricity.

2. It may consist of a continually reversing current of inductive electricity of a form in quality between the static and galvanic kinds. This appears the more probable as its source is said to be a vibrating armature, in which of course there are continuous interruptions, the induced currents formed by the interruptions running in an opposite direction from those formed at the making of the contacts, as is well known by all electricians. Such continually reversing currents of course cannot act on the galvanometer, gold leaf electroscope, or Leyden jar, as their rapid reversion neutralizes all possible charge, the only manifestation being the sparks, of which, however, the rapidity of the succession causes an abundance, little affected by imperfection or even absence of insulation.

At the same time, this would explain why one end of a long wire, bent over the other end connected with the electric generator, will produce a spark. Electricity is present in such abundance that branch currents are easily supplied; while at the same time the two polarities are continually and so perfectly balanced as to exactly counteract one another, so as to be unable to charge any conductor, or to manifest the results of such charge, as in an electroscope, or to establish a polar current and manifest its results, as with a galvanometer. It is undoubtedly a manifestation of electricity; and being neither positive nor negative, as is the case with all the forms of electricity thus far known, it might be called neutral electricity.

The sparks investigated by Dr. Reiss, the well known German electrician, and called by him weak sparks, have polarity, being either positive or negative; and although they have certain resemblances to the electricity obtained by the method of Mr. Edison, they appear to be of a different nature, having a very different origin.

The most remarkable feature of this new form of electricity, which proves its perfect neutrality, is that it has no apparent effect on the human body, and none on even that most delicate of all electric tests, the properly prepared frog's leg, unless an exceedingly strong galvanic current is used around the magnet.

#### Two New Street Engines.

A new traction engine for street usage has recently been tested in Brussels, Belgium, with satisfactory results. Externally it resembles an ordinary street car, with the exception of the chimney which projects through the roof. The body is placed quite low, and the wheels, which run on rails, are concealed to within a short distance from the ground. The boiler is tubular and inextinguishable, and is heated by coke. The engine is one of the Brotherhood three-cylinder pattern. The exhaust is condensed in a tubular condenser, and the boiler is fed by a separate steam pump. The machine traveled without smoke or escape of steam, made no more noise than an ordinary horse omnibus, and turned sharp curves very easily. Another engine has been introduced in Paris; but instead of running on a tramway like the above, it is a kind of omnibus or steam carriage. It accommodates 12 passengers and weighs about 5 tons. A vertical engine supplies the motive power and occupies a space in the rear of but 39 inches high by 31 inches broad. A Giffard injector, forces in the feed water, which is taken from the gutters or any other convenient source. The machine will travel, at the rate of 9 miles per hour. About 1.3 horse power is utilized, requiring 600 quarts of water, and 110 lbs. of coal per hour.

#### THE NEW PHASE OF ELECTRIC FORCE.

In our number for last week, we called attention to what we at first supposed to be a similarity between the prior experiments of Professor Reiss and those of Mr. Edison. A further examination of the Reiss reports satisfies us that the results obtained by Mr. Edison are novel, and have little or nothing in common with those of Professor Reiss.

We have had an opportunity of closely examining the apparatus by which Mr. Edison and his assistants obtained the evidences of the supposed new kind of electricity which has lately elicited so much inquiry and speculation, and we present herewith three diagrams of some of the apparatus used by Mr. Edison during his experiments.


The first recognition of the distinctive character of the spark occurred on the evening of November 23. Mr. Edison and his assistants, as we have already stated, were experimenting with a vibrator magnet, consisting of a bar of Stubb's steel, fastened at one end and made to vibrate by means of a magnet, when they noticed a spark coming from

section, which would drain the wire of induced electricity. If there were any—bright sparks are visible between the graphite points in response to the motion of the telegraphic key.

Standing on an insulated stool, the experimenters draw sparks from the following arrangement (Fig. 3), in which A is the end of the vibrator (which, as well as the battery, is insulated); B, a secondary battery; C, a 200 ohm coil of copper wire; D is a block of iron, and E, a condenser, all well insulated except A, which is of glass, and stands on the table.

In another experiment a glass rod, four feet long, with a piece of carbon fixed to one end, was well rubbed with a silk handkerchief over a hot stove, and the carbon point presented to the apparatus, the other end of the rod being held in the hand with the handkerchief: sparks were drawn, yet the galvanometer chemical paper, the sense of shock in the tongue, and a delicate gold leaf electroscope were not in the least affected by the mysterious current.

Tested in whatever way the experimenters have been able

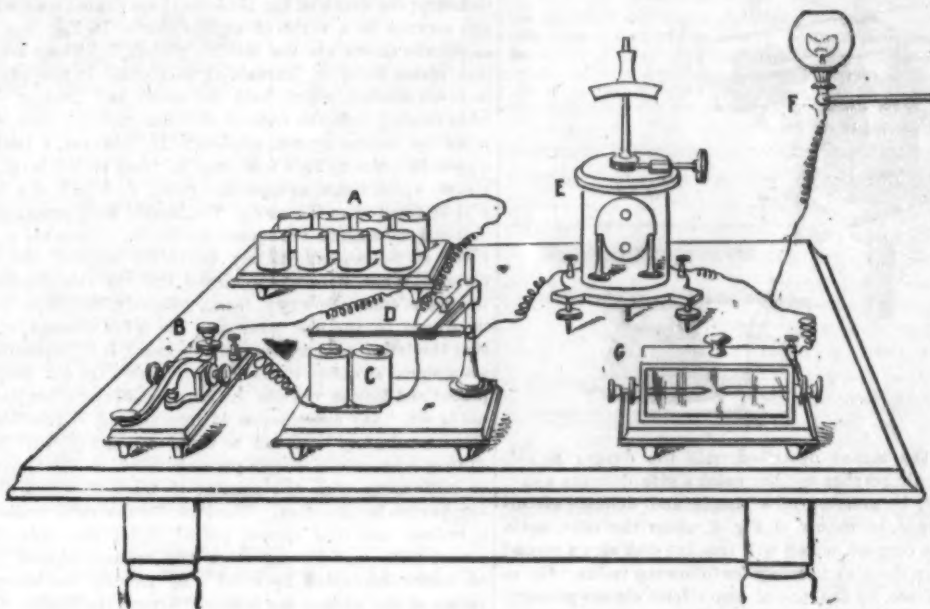

MR. EDISON'S APPARATUS, EXHIBITING THE NEW PHASE OF ELECTRIC FORCE.—Fig. 2.


the core of the magnet. They had often noticed the same phenomenon in connection with telegraphic relays, in stock printers when there were iron filings between the armature and the core, and in the new electric pen, and had always supposed it to be due to inductive electricity. On this occasion the spark was so bright that they suspected something more than induction. On testing the apparatus they found that, by touching any portion of the vibrator or magnet with a piece of metal, they got the spark. They then connected a wire to the end of the vibrating rod (the wire leading nowhere), and got a spark by touching the wire with a piece of iron. Still more remarkable, a spark was got on turning the wire back upon itself and touching any part of the wire with its free end. The end of the vibrating rod was then connected by means of the wire to a gas pipe overhead, whereupon a spark could be drawn from any part of the gas pipes in the room, and subsequently it was found that the spark could be drawn from any part of the whole system of city gas pipes. The vibrator and battery were next placed



on insulated stands, and the wire, connected with Z, Fig. 1, was carried over to the stove, about 20 feet distant. On rubbing the end of the wire against the stove, splendid sparks were observed. With the wire permanently connected with the stove, sparks could be drawn from any part of the stove with a piece of metal held in the hand. Again, while the vibrator was in action, a block of iron was placed near Z, but not touching the bar, nor connected with it in any way except by the wood of the base through the table, and sparks could be drawn from the iron.

These and other experiments which we have had the pleasure of witnessing show conclusively that the new force is not amenable to the laws of voltaic or static electricity.

An experiment made with the apparatus figured in the large engraving (Fig. 2) will satisfy any electrician that the force in action is not induced electricity. All the parts are insulated except the gas fixture. A is the battery; B, a common telegraphic key; C, an electro-magnet; D, a bar of cadmium (or other metal, cadmium being the best) supported by an



insulated stand; E is a mirror galvanometer; F, the gas pipe; G, a dark box enclosing pencils with graphite points (common lead pencils). The unknown current passes from the bar of cadmium through the galvanometer, without causing the slightest deflection, and—withstanding the gas pipe con-

to devise, the new current refuses to obey any of the established laws of electricity further than that it traverses metallic conductors, manifests itself as light, and can be controlled by making and breaking connection. Among its observed peculiarities may be noticed its lack of polarity, indifference to the earth (and consequently its capability of transmission through uninsulated wires), its power of producing action when turned back upon itself, its independence of electric non-conductors, and seeming lack of mechanical and physiological effect.

Mr. Edison has proposed the name "etheric force."

Since the above was put in type, Mr. Edison has sent us a variety of additional particulars pertaining to his new and interesting discovery, which we shall give to our readers in our next number.

#### TIMELY SUGGESTIONS.

**Every Employer** should present his workmen and apprentices with a subscription to the SCIENTIFIC AMERICAN for the coming year.

**Every Mechanic and Artisan** whose employer does not take the SCIENTIFIC AMERICAN should solicit him to subscribe for 1876.

**Now is the time** for old subscribers, whose subscriptions expire with the year, to renew.

**Now is the time** for new subscribers to send \$3.20 and commence with the new year.

**Now is the time** for forming clubs for the new year.

**It will pay** any one to invest \$3.20 for himself, his sons, or his workmen, for one year's subscription to the SCIENTIFIC AMERICAN.

**It is easy** for any one to get ten subscribers at \$2.70 each, and for his trouble obtain the splendid large steel plate engraving, "Men of Progress," worth \$10.

**It is easy** for any old subscriber to get a new one to join in taking the paper.

**It is no more trouble** to remit \$6.40 for two subscribers than \$3.20 for one. The sender gets a copy of SCIENCE RECORD, or of WHINKLES AND RECIPES, as he may prefer, for his trouble.

**If any mechanic** whom you ask to subscribe says he cannot afford it, tell him he cannot afford not to.

**If any one wishes specimens** of the paper to examine before subscribing, tell him to write to the publishers, and enclose 10 cents, and it will be sent to him by return mail.


**If handsome name lists and prospectuses** are wanted to assist in obtaining subscribers, send to the publishers of this paper.

**Binding.**—Subscribers wishing their volumes of the SCIENTIFIC AMERICAN bound can have them neatly done at this office. Price \$1.50.



(Continued from first page.)


will thus have completed exactly one quarter revolution, changing for a given location from an edge view to full face, or vice versa. The reader has doubtless ere this divined that the despatcher, in raising a danger signal to release the outgoing train, or in setting the flying switch signal, simply pressed a button which established an electric current, and thus charged the disks as was necessary. From the foregoing also, it will be obvious how this signal is worked on the block plan from two different points. As soon, for example, as a train passes a given location, an operator there

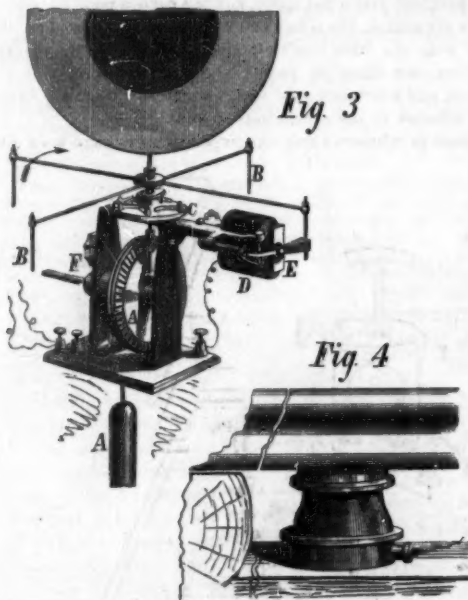

posted, by the means described, sets the danger signal. When the train reaches another point a safe distance away, it may itself, by pressing on a simple and delicate circuit closer, arranged, as shown in Fig. 4, under the rails, again establish the current, which will free the disk arm a second time and turn the disk to safety for following trains. Or, as it is easy to see, by the use of two circuit closers properly disposed, the train might set its own danger signal and then reverse it when a suitable distance has been traversed.

But it is not enough that the signals should be set. The people in charge of them must also be infallibly informed of that fact, as well as of any failure in the working. For this purpose the tell-tale shown in Fig. 2 is used. This is the machine which announced that the incoming train, in one example, was coming over the 53d street crossing; or more properly, it first showed that a block signal had there been set and afterwards reversed; for through that signal it was operated, as we now proceed to show.


By examining the circular stage, C, in Fig. 3, a pair of springs at the left hand side, placed so as to overlap, will be noticed. There are two pairs of these springs, arranged diametrically opposite to each other on the circle, and hence between the two similarly disposed single springs, through which the circuit, as before explained, is established. The members of each pair of springs overlap without touching, but are brought in contact by one of the pins on the cam on

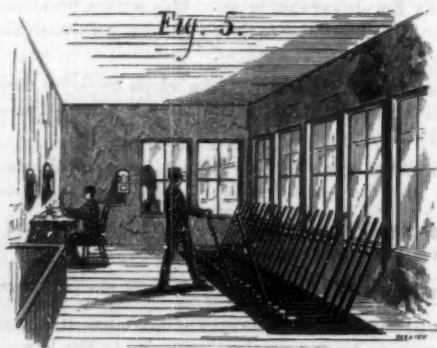

the disk shaft, during the revolution of the latter. Without entering into further detail, we may state that this contact must necessarily be caused with one or the other pair of springs whenever the disk changes position, and the effect of such contact is to send a current to the electro-magnet in the indicator, Fig. 2. The armature of this magnet is connected with the index clapper, and the general construction is such that, whenever the magnet is excited, the clapper will be thrown over to a position opposite to that in which it happens to be. The relation between indicator and signal is so adjusted that whenever the signal shows "danger," the clapper, which has a weighted extremity to aid its motion and to strike a gong at each end of its course, and so to give warning, swings over to "block;" when the signal is reversed the arm swings back to "clear." During its travel it strikes a suspended ball, and this, vibrating, shows to an operator, who may have several indicators before him, which one has just become reversed. By this arrangement, it will be evident that when the signal moves the indicator must show it, and vice versa; so that the operator always has accurate knowledge of the state of the sections of line under his charge, no matter how far distant from him, or how widely separated the same may be. There are many ingenious points about the system, which lack of space forbids our describing. We may mention, however, the device partially shown

at F, in Fig. 3, which consists of the winding stem for the signal weight, and also other mechanism, which compels the turning of the stem and the consequent winding of the cord, before the door of the case in which the signal is contained can be unlocked to admit of the insertion of the lamp at night. Another ingenious device is that used for draw-bridges, which consists of a lock on the crank, which withdraws the locking pin of the bridge. It is impossible to do this until a button is pressed, which sets a danger signal for approaching trains, nor can that signal be reversed or tampered with until the bridge is again securely locked in place.

One of the most important localities where that system is necessary is at the crossing of several tracks, similar to that at 53d street; and here also is used the new switch apparatus, which forms the third and last portion of our subject. Fig. 5 shows the interior of the switch house with the working levers. Each lever is connected to a weighted arm, A, Fig. 6, and also, by suitable interposing connections, through the rod, B, to the locks, the signals, or switches. Attached to the shank of the lever, at C, are jointed rods, which are secured to a series of square shafts, D, Fig. 7. Just above the shafts are the locking plates, E. These are flat iron plates hung in journals at each end. In the edge of each are notches, which hold the levers and prevent them from moving from the ends of the slots in which they work when the latches lay flat, as shown. If, however, a latch be tipped by pressing on a foot piece in front of the lever, the rod of which bears against the point, F, Fig. 7, the lever will be freed from the notch. The interlocking arrangement is found in cams on the square shafts, D. These are so disposed as to be immediately under the edge of the latch plates. When a shaft is so turned that the cam presses on the plate from below up, then, obviously, the plate cannot be tipped by the foot piece, nor the lever disengaged; so that the latter is thus securely locked. It is impossible to set a signal at safety if the switch points are not properly placed and locked, nor can the latter be altered after the signal is set. Any combination of interlocking is possible: in other words, any lever can be made to lock any other lever, so that it becomes a simple problem to adjust the apparatus in conformity with the number of track requirements at any particular situation. The lock for the rails consists of a hollow cast iron sleeper placed under the ends of the switch rails, and having other two crescent-shaped pivoted latches connected by a rod. By moving the latter, the points of the latches are lowered beyond the bottom of the

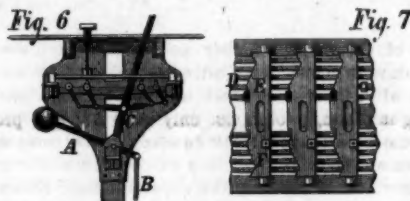

rails, so that the same can be moved sideways, or raised so as to prevent any similar motion. The construction is such that, unless the rails are properly placed, it is impossible to raise the latch, which thus offers an additional means of safety. Taken as a whole, the ingenuity, simplicity, and utility of this perfect system of communication, and the contrivances invented to accomplish it, are truly wonderful. The mechanical appliances are the joint inventions of Mr. J. M. Toucey, the General Superintendent, and Mr. William Buchanan, Superintendent of Machinery, of the Hudson River Railroad.

The electro-magnetic signals are the invention of Mr. Daniel Rousseau of this city, and are the subjects of several very recent patents. The depot arrangements are the results of the combined skill of Superintendent Toucey and Depot Master Franklin. To all the above named gentlemen we are indebted for much courtesy in facilitating our obtaining the interesting facts here presented.

#### ACIDIMETRY APPLIED TO THE TESTING OF VINEGAR.

In order to determine the value of a vinegar, it is necessary to discover in what proportion acetic acid is present and to assure oneself that no foreign mineral acids are contained. The chemist executes these various operations with acidimetric liquors, reagents, and apparatus; but there has been for some time needed a simple and practical process available to those who may not have at their command the resources of a laboratory. MM. Revell and Salleron have recently devised an acidimeter, the use of which is illustrated in the annexed engravings (taken from *La Nature*), and which can be readily understood and the directions for its manufacture and employment followed.


The necessary apparatus consists, first, in a tube of glass closed at one end as shown in Fig. 1; near said extremity, at the zero mark, the word "vinegar" is inscribed to indicate the amount of vinegar to be employed. Above the zero, the tube is divided off, and the divisions are marked 1, 2, 3, etc., so as to show the richness in acid, as will be described below. Second, there is a small sponge attached to a whalebone to be used to clean the tube after each experiment. Third, a pipette (Fig. 2), is marked to show a quantity of 0.25 cubic inch of liquid, so that the amount of vinegar for each test can be accurately measured. Lastly a flask of liquor, used as a standard acidimetric reagent, is added.

One fourth of an inch of vinegar is taken into the pipette and retained therein by the finger, as shown in Fig. 2. This is allowed to flow into the graduated tube and the acidimetric liquid, colored blue, is slowly poured in. The fluid soon becomes red when the tube is agitated by being turned over,

the thumb stopping the opening. More of the test liquid is added, the mixture a second time shaken, and so on until the fluid in the tube becomes of the color of the red outer skin of an onion. The graduation on the tube, corresponding to the level of the liquid, is then read off, and this shows the centesimal proportion of acetic acid contained in the vinegar.

The reaction can easily be followed. The acidimetric liquor, prepared in advance, is a solution of borax and caustic soda. The proportion of these ingredients is calculated to correspond to a certain quantity of crystallisable acetic acid. The liquor is colored blue by litmus, and indicates by its change to violet red the moment when the saturation of the acid by the base is effected.

Vinegars are sometimes adulterated with sulphuric and other mineral acids, which may be detected as follows: The vinegar to be tested is boiled with a few fragments of starch.

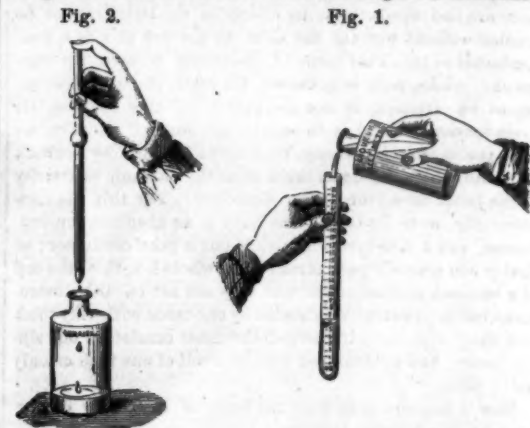

It is then cooled, diluted, and a few drops of iodine tincture dropped in. With pure vinegar, the blue color of iodide of starch should show itself; if no coloration ensues, a foreign mineral acid is present. Wine vinegars are frequently falsified with wood vinegars (pyroligneous acid): this last product almost invariably contains small quantities of sulphate of soda, the presence of which may be detected by the addition of chloride of barium, which yields a white precipitate, sulphate of baryta.

#### KING'S IMPROVED SUPPORT FOR PRINTERS' GALLEYS.

The annexed engraving represents a simple little device designed to support a printer's galley when the same rests upon the case, during the process of making corrections in the type or during the transfer thereof of type from the stick. Ordinarily the galley is rested against the ledge of the case or else placed diagonally across the latter, thus covering several letter boxes and necessitating its being moved whenever the types contained in such receptacles are required. The present device sustains the galley in such a position that none of the boxes are wholly closed, so that access into any one of them may easily be had.



As shown in the engraving, it consists simply of a metal casting, forming a straight grooved piece between two parallel pieces, disposed at the ends and at right angles thereto. The groove in the central portion and notches in the cross pieces fit over the transverse partitions of the case, and the galley rests against one crosspiece while the other presses against the longitudinal partition or edge. The invention is a handy convenience for compositors.

Patent now pending through the Scientific American Patent Agency. For further particulars address Messrs. Johnson & King, 100 11th street, Brooklyn (E. D.), N. Y.

The hydraulic ram is especially useful where there is a small stream of water and only a slight fall. A fall of two feet, and a flow of 1½ cubic feet of water—93½ lbs.—per minute, will deliver 0.010 of a cubic foot of water per minute at a height of 38 feet.



## NEW DOUBLE SHAPING MACHINE.

Messrs. R. Fernau & Co., of Vienna, Austria, have recently put in market a double-acting shaping machine, of which the specialty consists in the arrangement of the feed motion, which will be understood by reference to the perspective sketch and the detail. The boss of the driving pinion is extended, and has a curved slot formed in it, which imparts an oscillating motion to a lever; this motion is transferred to a horizontal shaft, through which it is conveyed to the tool holder. On the front end of this shaft is a cast iron cap, which serves as a lever and also as a cover. In a slot in the cover (see Fig. 2) is placed a bolt, which can be moved up or down at will, the end of the bolt projecting, as shown in Figs. 1 and 2, into a triangular opening in the piece within the cap, so that the oscillating movement of the cap gives greater or less motion to the piece above mentioned, which carries at the upper end a pawl and ratchet driving a toothed wheel, that in its turn conveys motion to a worm and wheel. The spindle of the latter carries a horizontal pinion gearing into a rack, and gives motion to the wheel.

## Skilled Labor.

The richest mines of wealth of a nation are its workshops, its factories, and its farms, filled with men of highly trained and skilled labor, it being a universal law that the world's great prizes go to the best. This is not simply an abstract question, but one affecting us all in our prosperity and success every day and every hour of the day, and every day in the year. France, Switzerland, Prussia, and Germany have laid us, and are laying us, every year under contributions of millions of dollars for very superior workmanship, taste, and skill. Their silks, their laces, their cloths, their china and porcelain, their bronzes, their fabrics in metal and wood, and their objects of *certu* and art, could be largely produced in this country if we had developed and educated our artisans and mechanics up to the same perfection in workmanship that they have in those countries.


Their mode of thorough instruction in their workshops and manufacturing establishments produces men of the highest order of training, ability, and skill. If we take, as an example, the small State of Wurtemberg, in Germany, with a population of 1,778,000, we find that they have forty-nine industrial and technical schools for the training of boys and educating them in all the industrial arts. In these schools there is a mercantile and commercial course, and one for the application of chemistry to the chemical arts and manufactures; where there are fifty-one professors and teachers of chemical and physical mineralogy, modeling rooms, mechanical workshops, rooms for drawing, botanical garden, and astronomical observatory. There are other schools for building instruction and tradesmen; where builders are trained for masters and constructors of public works, etc., and plasterers, carpenters, grainers, painters, smiths, etc., are educated for foremen and masters; and the schools are crowded with those for whom they were intended, while the graduates are eagerly sought everywhere on the Continent for their superior excellence.

There are also schools for education in all agricultural pursuits, in which practice is combined with theory, they having under their care four hundred square miles of territory. These schools are largely attended, for in one year 12,040 persons, in 523 places, were getting a thorough, complete, and practical agricultural education. Connected with these schools are institutions for practical training in anatomy, physiology, and diseases of animals; and a smithy is attached, in which 4,000 animals were shod per year.

The result of this discipline is shown in the superior skill of the workmen, the excellence of all their works in the arts and sciences, and the harmony existing among them. A thorough acquaintance with a particular industry necessitates a wide range through the field of knowledge, and makes a familiarity with all the causes which produces such effects. The brain is the motive power as well as the guide, for it points the way, and all things move as it points. Skilled labor is its own protection. While its progress may be temporarily impeded by the glittering tinsel of some superficial work, yet its final success is conclusive proof that "all is not gold that glitters," for merit in all things must win.

Carelessness and ignorance are the most fruitful sources of loss of life and property. Proportionately, as the mind becomes trained and disciplined, carelessness ceases; greater care is manifested in the management of all the affairs of


life and the products of our workshops. The great hurry, which has characterized our people, to reach results and to accumulate riches causes that neglect and superficial workmanship which is so prevalent. Scarcely a paper is published that does not contain in its columns some startling accident, accompanied by great loss of life, occasioned by defective machinery or ignorance in its management. Railroad collisions nearly all result from these causes. The disastrous errors which frequently occur in many cities among chemists and druggists arise from an ignorance which never would or could exist if a compulsory and skillful training in schools established for the purpose, under practical as well

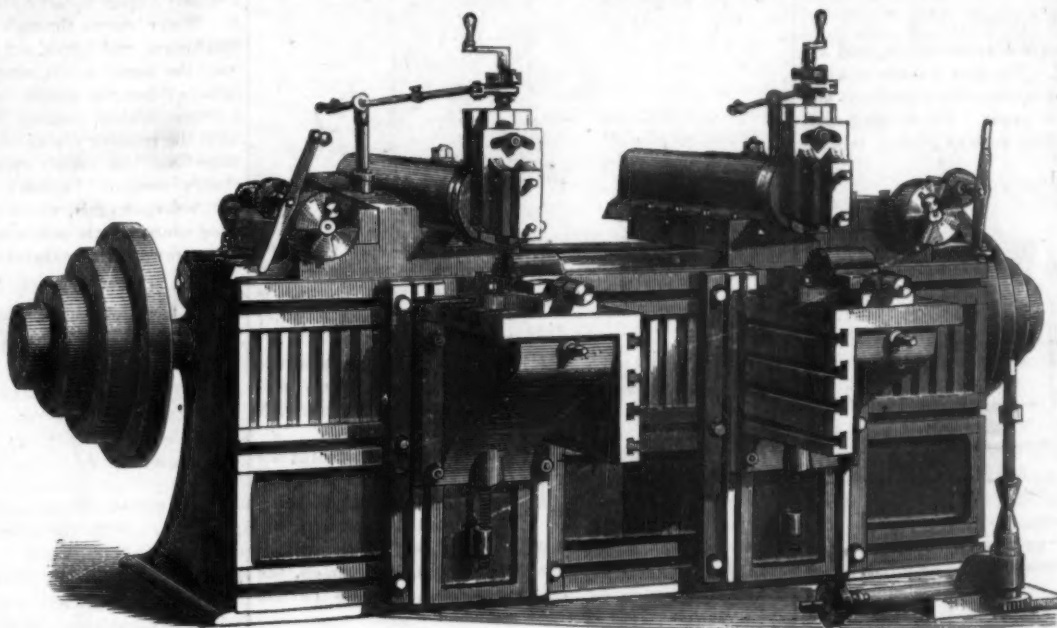

DOUBLE SHAPING MACHINE.

as theoretical masters of the particular industry sought to be acquired, had been gone through. We often read of the falling of a floor filled with people. This shows an ignorance of building and of the strength of different materials, a knowledge of which is so indispensable in this important branch of industry. Schools established for a thorough training in mining would not only save life and property, but cause a more profitable development of our mineral resources.

"Knowledge is power." It is the limiting director of the productiveness of all labor. As a knowledge of all the arts, a thorough acquaintance with the laws of nature exists, so will be the progress in improvement in all the affairs of life. Its application to all the industries causes a greater productiveness from the same labor. It has decreased the labor of farming, and increased its producing power. The superseding of the scythe and the cradle by the mowing and reaping machines has enabled a much greater number of acres to be tilled; at the same time a larger value is realized from the same quantity of land.

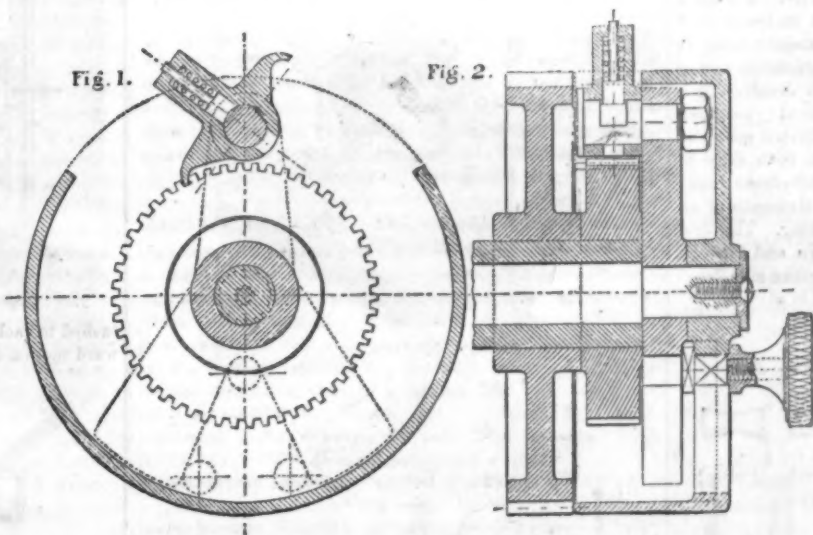

DOUBLE SHAPING MACHINE—SECTIONAL VIEW.

The greater the skill, the greater the wages. Every hour spent in improving the mind is a bid for increased pay. "The laborer is worthy of his hire," and that worth is enhanced just in proportion as a knowledge of his work is great or small. The foreman of a workshop receives greater compensation than any other workman. Why? Because he possesses greater intelligence on all matters connected with the work. This subject is capable of being drawn to a great length; but enough has been said to show the benefits arising from knowledge and skill in all branches of industry, and that industrial and technical schools should be established everywhere.—*Philadelphia Inquirer*.

THE volume of a confined mass of gas is inversely proportional to the pressure to which it is exposed; the smaller the pressure the larger the volume, and the greater the pressure the less the volume.

## Sir Isaac Newton's Experiments.

When Sir Isaac Newton changed his residence, and went to live in Leicester Place, his next door neighbor was a widow lady, who was much puzzled by the little she had observed of the philosopher. One of the Fellows of the Royal Society of London called upon her one day, when, among other domestic news, she mentioned that some one had come to reside in the adjoining house, who, she felt certain, was a poor crazy gentleman, "because," she continued, "he diverts himself in the oddest ways imaginable. Every morning, when the sun shines so brightly that we are obliged to draw the window blinds, he takes his seat in

front of a tub of soapsuds, and occupies himself for hours blowing soap bubbles through a common clay pipe, and intently watches them till they burst. He is doubtless now at his favorite amusement," she added; "do come and look at him." The gentleman smiled, and then went up stairs, when, after looking through the window into the adjoining yard, he turned round and said: "My dear madam, the person whom you suppose to be a poor lunatic is no other than the great Sir Isaac Newton, studying the refraction of light upon thin plates, a phenomenon which is beautifully exhibited upon the surface of a common soap bubble."

This anecdote serves as an excellent moral not to ridicule what we do not understand, but gently and industriously to gather wisdom from every circumstance around us.—*Druggist's Circular*.

## Corner Lots.

To persons about to build a residence in the city, the following article from the *Land Owner*, on the most desirable corner to locate on, will be read with interest:

When a lot is on the northwest corner of two streets, it is best, in a sanitary point of view, for its frontage to be on the west side of the street and the depth on the north side. The house thus gets the sun in the front bed rooms in the morning, and on the side of the house, looking south, nearly all day. When a lot is on the northeast corner, it is best that its frontage should be on the east side and its depth on the north side of the street. The east side of the street looks west, from which quarter our prevailing cold summer winds come. All rooms looking west are very cold at night, especially at the time of year when sudden changes of temperature are common. If the front bed room windows face the east side of the street, they can be kept closed at night and air secured from the sheltered side windows on the north side of the street, on which the sun shines nearly all day. If a lot is on the southwest corner, it is better that the frontage be on the south side, and its depth on the west side of the street. The rays of the sun do not strike the south side of the street, while they do strike the west side in the early half of the day—thus getting the sunshine and heat in the front bed rooms at the most desirable hours. When a lot is on the southeast corner, it is best that it should have its frontage on the south side and its depth on the east side, for the reason, before stated, that the sun does not strike the south side of the street, while its rays are poured on the east side from about noon till 5 p.m. The cold winds of night can be kept from the best (the front) bedroom by having the windows closed on the east side and by opening them on the south side. These are important facts to be remembered by those who are subdividing large lots for sale, or by those who are erecting houses on large corner lots, where they are in a position to front them either way.

No one looking for a residence site, who can afford to buy a corner lot, should fail to do so. By having a corner all difficulty about securing abundant sunshine and air in each room is avoided. Of almost equal value with sun and air is the cheerfulness of rooms in a corner house. The effect upon women, who have little exercise or change, is exceedingly beneficial. There is, from a corner house, an outlook that whiles away many an hour which would otherwise be dull to the dweller in the house. The average cost of a corner lot over a middle one in a residence location is 40 per cent, and it is worth more than this difference. A corner house will rent for nearly enough more than a middle one to justify the purchase of the former from an investment point of view alone. Those who wish a sunny, well aired, and really cheerful dwelling should strain every point to secure a corner. Better a corner and poorer house than a fine house hemmed in between other dwellings.




## FILTERS AND LIQUID METERS.

In many localities, where the water supply is drawn from rivers adjacent to cities or from sources liable to be contaminated by decaying organic substances, filtration of the fluid, before using it for drinking or cooking, is an important sanitary precaution. To this end various devices have been invented, all so constructed that the water passes through certain substances which, while arresting the passage of matter mechanically suspended, are sometimes of such a nature as to absorb deleterious gases and effete substances. In the annexed engravings, from Knight's "Mechanical Dictionary," will be found representations of several different inventions in the filter line.

## LABORATORY FILTERS,

used by chemists, are of the simplest construction, and are represented at *a* and *b*, in Fig. 1. The first is made of a circle of bibulous paper, folded and opened into a quadrant and inserted into a funnel of glass or paper. For filtering matters which become viscid on cooling, such as gelatin, tallow,

Fig. 1.

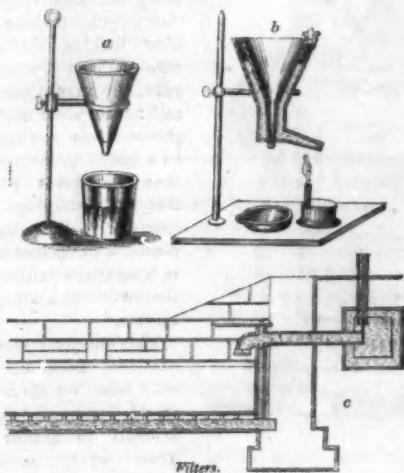


Filters.

wax, etc., the apparatus shown at *b* is used, in which the filter is placed within a water bath which has a leg heated by an alcohol lamp.

## DOMESTIC FILTERS

are frequently made in the form of a submerged jar or box composed of porous stone, through which the water passes

Fig. 2.



Siphon-Filter.

and is withdrawn by an exterior faucet, as represented at *c*, Fig. 1. In another form the filter is placed within a barrel, and the water passes through a coarse filter, *D*, Fig. 2, and up a central tube, *C*, to an upper chamber and thence through filtering material placed between two perforated diaphragms, *F* *G*. The water is drawn from the lower annular chamber by a siphon, *G'*, having a stop cock at its lower end. A good domestic filter is easily constructed of a deep wooden tub divided by a tight vertical partition


## REVERSIBLE FILTER

interposed in a length of pipe. The water flowing from *A* to the filtering surface, *T*, has its impurities detained, while the strained water runs off at *B*. When the filter surface, *T*, has become foul, the handle, *H*, is turned, throwing the dirt to the delivery side, where it is carried off by the current of passing water. *A*

## CHARCOAL FILTER

is shown in Fig. 4, which is used for sugar refining. Upon the bottom of a high cylindrical vessel, which is charged with animal charcoal, *C*, a filter cloth is spread, and upon this the lower charcoal layer is tightly packed, while the remainder of the filling is left loose. Another cloth and a perforated plate complete the column. The sirup to be filtered is let in from the cistern, *S*, the supply being regulated by the ball cock, *b* *d*. *t* is a tube by which air is allowed to escape, and *m* a manhole for giving access to the interior for cleansing, etc. An arrangement of a filter in connection with a cistern is represented in Fig. 5. The water passes down through the

Fig. 3.



Reversible Filter.


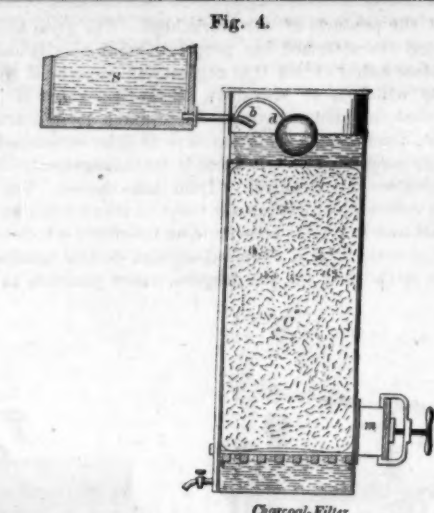


Fig. 4.

Charcoal-Filter.

charcoal or other filtering material in a permanent chamber, on one side of an axial division, and, after passing beneath the latter, rises up and is drawn off from the other side.

Fig. 5.



Filtering-Cistern.



In order to ascertain the quantity of a liquid discharged or received through an orifice.

MECHANICAL LIQUID METERS of various forms are employed, the principal being known as the diaphragm, the balanced (in which compressed air is used), the piston, the propeller, and the flexible tube and roller.

In Fig. 6, at *A*, is shown THE SIEMENS AND HALSKE SPIRIT METER,

which registers the quantity of spirit discharged and also the amount of absolute alcohol contained therein. The liquid entering at *a* passes through the pipes, *c* *d*, one of which terminates in a chamber, *e*, whence it is carried by the pipe, *f*, through the vessel, *g*. The other conducts it directly to the upper part of *g*. The parts of the pipes passing through *g* are perforated so as to make currents in the vessel in order thoroughly to mingle the spirit, and the two pipes meet at *h*, whence the liquid is led by *i* into a chamber, *j*, and thence to the volumeter,

Fig. 6.

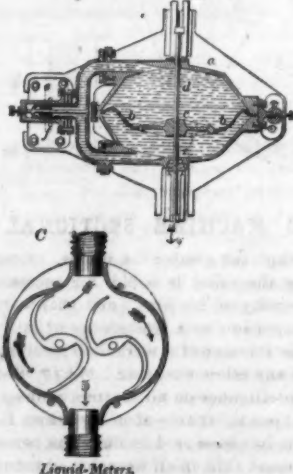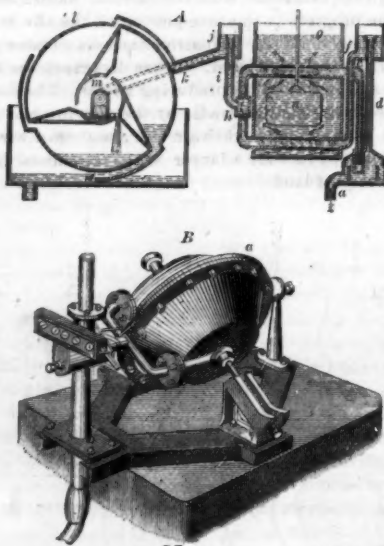

Liquid-Meter.

this then begins, while the aperture through which it received its supply is carried, by the rotation, above the liquid in the central chamber. The registering dials are actuated in the usual manner. The amount of pure spirit is determined by a hydrometer, *m*, in the tank, *g*, the instrument being filled with alcohol, and rising and falling according to the density of the spirit. Its motions actuate suitable registering devices which give an indication each time the volumeter is emptied, and to an extent showing the quantity of pure spirit contained therein.


## DUBOY'S WATER METER

is represented at *B*. A diaphragm, *b*, in a casing, *a*, carries a closely fitting metallic disk, *c*, held in position by the rod, *d*. Water enters through either duct, *e* or *f*, raises the diaphragm, and forces out the water on the opposite side until the vessel is full, when the diaphragm fits against that side. When the weight rises to the top, that side is given a preponderance, causing the vessel to turn on its pivots until the relative places of the sides are changed. At the same time, the supply opening is closed and that for discharge opened. Payton's meter, *C*, same figure, contains two S-shaped arms, whose extremities are during rotation in close contact with each other and with the sides of the box. The arrows indicate the direction of the current.

## ATWILL'S PULSATING PISTON METER,

Fig. 7, has a piston, *E*, which turns on an axle shaft com-

Fig. 7.

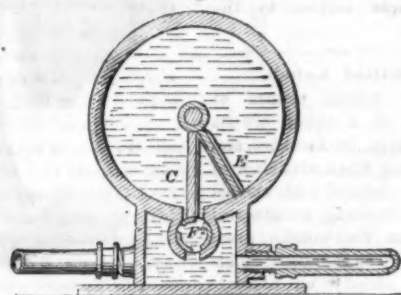


Pulsating-Piston Meter.

municating motion to the register and carrying an arm which, at the end of each stroke, changes a cylindrical valve, *F*, so as to cause the water alternately to enter and discharge from the measuring chamber at opposite sides of the internal partition, *C*. The spiral vane meter, shown in Fig. 8, is simply a water wheel within a pipe connected to a register to indicate the flow of water. The flow is regulated by a sliding valve. In

## YOUNG'S SPIRIT METER,

same figure, a float, *G*, in the measuring chamber, is at-

Fig. 8.

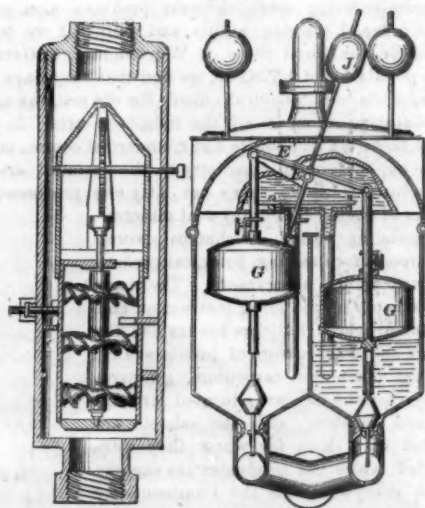


Spiral-Vane Meter.

Young's Spirit-Meter.


tached to each end of a pivoted beam. The alternate downward motion of the floats, as the chambers are discharged,

Fig. 9.



Sickles' Liquid-Meter.

Fig. 10.



Liquor-Thief.

which is a hollow drum, *l*, having a concentric cylinder, *m*, the space between the two being divided into three compartments. Three slots in the central cylinder permit the liquid to flow successively into each compartment, as it in turn occupies the lowest position, and the apparatus remains stationary until the lower chamber is full. The discharge of

directs the induction flow from one to the other. The valve stems have a limited sliding motion in the floats, so that each



of the latter will rise to a sufficient height without raising the valve to permit of emptying the chamber. At the point of discharge, the weighted rod, J, is thrown past the vertical and, closing the valve to one chamber, opens the induction pipe to the other, depressing that float sufficiently to close the escape valve. In

#### SICKLES' METER,

Fig. 9, the liquid flowing into the chamber, D, is, by means of the valve, C, admitted alternately to each end of the hollow valve, B, which is divided into compartments by the partitions, I I. From these the fluid flows alternately through appropriate ports behind the pistons, a a', on the rod, b, which has tappets that strike the pins, e e', on the upright shaft, w, causing its partial rotation and operating the slide valve, C, which admits the fluid into the compartments of the valve, B.

We add, in Fig. 10, one more device used in connection with liquids, to which the name of

#### LIQUOR TRIEF

has been applied. It is simply a tube which is let down through the bung hole of a cask and then closed, so as to withdraw liquid therefrom. It is closed at the bottom by a plug, actuated by a rod passing through the top, as shown.

#### PRACTICAL MECHANISM.

BY JOSHUA ROSE.

NUMBER XXXVIII.


#### MARKING OUT ENGINE GUIDE OR MOTION BARS.

If an engine guide bar is to be made parallel in its breadth and thickness, it may be marked off from the directions already given for marking a scale. Such bars, however, should always be made thicker in the middle than at the ends (as they are always made in English locomotives) for the following reasons: If the strain upon the bars is equal at all parts of the stroke, the middle of the bar will be subject to deflection because of its distance from the blocks or supports at the ends. Again, towards and at the end of the stroke, the connecting rod stands nearly parallel with the center line of the bore of the cylinder, and then the strain upon the guide bars is very slight; but as the stroke proceeds, the angle of the connecting rod increases until (near the center of the stroke) it becomes the greatest, and therefore places the most pressure upon the guide bars. If, then, the latter deflect in consequence of this pressure, the gland and packing ring in the cylinder cover act as a fulcrum, and the piston rod as a lever, forcing the piston against the top and bottom of the bore of the cylinder, tending to wear it oval and also to wear it to a larger bore in the middle than at the ends, because the deflection of the bar is inappreciable at the ends, whatever it may be in the middle. That the deflection of such bars is sufficient to be of practical importance will be perceived from the following:


During the years 1864, 1865, and 1866, I fitted up under contract nearly one thousand guide bars (for locomotives) their average size being about 30 inches long, 3½ inches broad, and 1½ inches thick or deep at the ends, and 3 inches thick in the middle of their length. They were filed up in the vise, and made practically true to a surface plate. When the first few sets were delivered to an inspector for examination, they were rejected on the ground of being hollow in their length, to a degree plainly perceptible in the surface plate marks, which showed very plainly at the ends of the bar, and graduated away until, in the middle of each bar, they were barely perceptible. This difference was obviously in the wrong direction, since the middle of the bar should, if there be any difference, mark the plainest, because it sustains the most abrasion. I was sent for by the inspector, who had a bar placed upon the bench, supported by a block of wood under each end; and by request, I applied the surface plate, and found, to my astonishment, the marks to be as above stated. As a consequence, the whole of the set of eight bars were returned to me to be refitted. Upon replacing them in the vise and applying the surface plate, I found each bar to mark as true and even as could be desired, and hence returned them untouched, perceiving that the bars, stout as they were, deflected from their own weight, the amount of the deflection being doubled by supporting them, in the one case in the middle and in the other by the ends. The inspector claimed that, by testing the bars while supported at their ends, he had tested them in the position in which, and supported them as they would be, when in their working places: but since no provision had been made for holding them (while being filed up) in that position, and since the top bars stand upside down when upon the engine, it was plainly impracticable to file them up in such a position. The bars were passed, the controversy having served to demonstrate their appreciable deflection, and also that the bottom bars should be filed up a little rounding and the top ones level in their respective lengths. To mark off such a bar as is here described, one face must either be first trued up, or the marking-off must be performed at two separate operations. The better plan is for the marker-off to examine the bar as to size, and have one face planed off. If either face appears defective, it should be the first planed. If the bar appears sound all over, the outside edge face of the bar should be the one to be planed off preparatory to marking off; and in setting it to surface it, care should be taken to set it true with the top and bottom faces, if they are parallel to each other; and if not, to divide whatever difference there may be between them. The bar may then be placed upon the marking-off table in the position shown in Fig. 177, A being the marking-off plate, B the guide bar, C C pieces of wood to lift the bar off the plate. By means of small thin

wedges, the planed face, B, of the bar is set at a true right angle to the surface of the plate, and tested by a square. The next operation is to mark off the top or uppermost face, and the question here arises: Shall it be so marked that there will be an equal amount of metal taken off the top and bottom faces, or otherwise? First, then, since the quality


Fig. 177.




of the metal is the best towards the surface, it is a consideration to take off as little as possible, so as to leave a hard wearing surface; this may appear a small matter, but it is always right to gain every superiority attainable without cost. Therefore, all other things being equal, we should prefer to take as little metal off the top face as would be sufficient to make it true, and should therefore mark it out with that view. Here, however, another consideration arises, which is that the outline of the bottom face is not straight, and cannot therefore be planed lengthways from the center of the bar to the ends; and if such bottom face is to be shaped across its breadth, instead of lengthways, it is a comparatively slow operation, and much time will be saved by so marking off the bar that the bottom will only just true up, so that all the surplus metal will be cut off the top face, which, being done in a larger machine, and lengthways, is a much more rapid operation. There is, however, a method of obtaining both the advantage of taking as little as possible off the top face, and planing the bottom face for the most part lengthways. It is shown in Fig. 178, A being the bar;



the two faces, B B, may be first planed parallel (as required) with the face, C; the back of the bar may then be planed in two operations from the point, D, to the junction with B at each end. Were the method of procedure employed, it would pay to leave the most metal to come off the back of the bar; but there are yet other considerations, which are the facilities in the shop. If the shaping machines are not kept fully occupied, while the planing machines are always in demand, it will pay (if there are not many bars to be planed) to leave as little as needs be to be taken off the bottom of the bar and the remainder off the top. If, however, many bars are to be planed, the most economical of all methods will be to plane the backs by placing, say, 8 of them at a time across the table of the planer, cutting off the ends at the same chucking. Supposing this plan to be adopted, we set the scriber of the marking block just below the lowest part of the surface of the bar, and draw a line along its planed surface, and then another line along each end, to denote the thickness of the parallel parts at each end, making this line longer than is necessary, as a guide in setting the bar in the shaper (in case the ends are shaped and not planed). We next mark off the length of the bar at the ends, using a square and allowing about an equal amount to be taken off each end; and then, still using the square, we mark a line equidistant between the end lines, to denote the center of the length of the bar, which will then present the appearance shown in Fig. 179, the inside line, A A, being for the top




face, the lines, E, for the parallel ends, the lines, B B, for the ends, and the line, D, denoting the middle of the length of the bar. We now turn the bar so that its planed face is uppermost; and setting a pair of compasses to the required thickness of the middle of the bar, we set one point at the junction of the lines, A and D, mark off with the other point a half circle, and then (turning the bar over) adjust it upon the table, as shown in Fig. 180, A being the table, and B a



block of wood and wedge to adjust the bar so that, if the scriber block be applied along the table, the needle or scriber point will mark just fair with the top of the circle at D and the mark, C, at the end of the taper part of the bar, A (the mark, C, showing the required distance from the end of the bar). Having made the adjustment, we draw the line, E, thus completing the marking of that half of the bar. We next remove the block of wood and wedge to the other end of the bar, and repeat the last operation, when the marking of the bar will be, so far as its outline is concerned, complete. It will be observed that we have drawn the lines in each case on the one planed surface of the bar only, and not all around the work. The reason for this is that the planed face is a guide, whereby to chuck the work and ensure its being set true. In the absence of one true face, it would be necessary, in marking off the first face, to mark the lines all around the work, which, when planed up, would serve as a guide whereby to set the work during the successive chuckings.


After the faces and ends are planed up, the holes in the

ends may be marked by the compass calipers and compasses, as shown in Fig. 181, A being the bar, and B B the compass



calipers set to the required distance. At the junction of the marks thus made, we make a light centerpunch mark, and mark off the circles for the holes, first marking a circle of the requisite size and defining its outline by other light centerpunch marks. We next draw from the same center a circle smaller in diameter, and define its outline also by small centerpunch marks; after which we take a large centerpunch, and make a deep indentation in the center of the circle, which will appear as shown in Fig. 182. The philosophy of

Fig. 182.

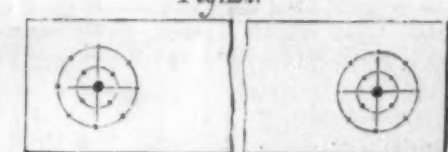

marking the holes in this manner is as follows: If the outside circle alone is marked, there is nothing to guide the eye during the operation of drilling the holes (in determining whether the drill is cutting the holes true to the marks or not) until the drill has cut a recess nearly approaching the size of the circle marked; if the drill is not cutting true to the marks, and the drawing chisel is employed, it will often happen that, after the first operation of drawing, the drill may not yet cut quite true to the marks; and it having entered the metal to its full diameter, there is no longer any guide to determine if the hole is being made true to the circle or not. By introducing the inside circle, however, we are enabled to use the drawing chisel, and therefore to adjust the position of the hole during the earlier part of the operation; so that the hole being cut is made nearly if not quite true before the cutting approaches the outer circle, which shows the full size of the hole. If, on nearly attaining its full diameter, the outer circle shows it to be a little out of truth, the correction is easily made. It is furthermore much more easy to draw the drill when it has only entered the metal to, say, half its diameter than when it has entered to nearly its full diameter.

The object of making a large centerpunch mark in the center is to guide the center of the drill, and to enable the operator to readily perceive if the work is so set that the point of the drill stands directly over the centerpunch mark. This is of great importance in holes of any size whatever, but more especially in those of small diameter, say, for instance, ½ inch, because it is impracticable to describe circles of so small a diameter whereby to adjust the drilling; and in these cases, if the drill runs out at all, there is but little practical remedy. The centerpunch marks for such holes should therefore be made quite deep, so that the point of the drill will be well guided and steadied from the moment it comes into contact with the metal, in which case it is not likely to run to one side at all. If a motion or guide bar requires to have one corner rounded off, as it should have to prevent its leaving a square corner on the guide block, which would weaken the flange of the latter, the corner cannot be marked off, but a gage should be made as shown in Fig. 183, A in the left hand

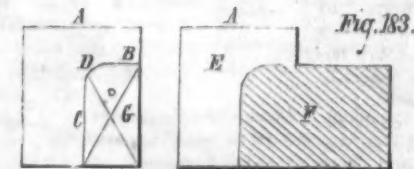


figure being a piece of sheet iron, say ½ inch thick, with the lines, B and C, and the quarter circle, D, marked upon its surface. The metal, G, is then cut away, and the edges carefully filed to the lines, thus forming the gage, A, which is shown upon the bar, F, in the position in which it is applied when in use. It is obvious that such a gage will scarcely suffice to get up a very true round corner; this, however, is accomplished by leaving the corner of the work a little full to the gage and then filing it up to the piece of work fitting against it.

Reference having been made to drawing the position of the recess formed by a drill before it has entered the metal to its full diameter, we may as well explain that process. Suppose A, in Fig. 184, to represent a piece of metal requiring to have a hole of the size of the circle, D, drilled in it, and that the recess cut by the drill is out of true, as shown by the circle, C. A round-nosed chisel is then employed to cut, at D, the groove there shown, running from the outside to the center of the recess, and which will have the effect, when the drill is again introduced, to draw the recess toward that side, thus causing the recess to be true with the marks.

THE largest flouring mill in America, it is said, is owned by Hon. C. C. Washburn, of Minneapolis, Minn. It is seven stories high, and crowded with machinery from top to bottom. Its cost was \$300,000, has 40 run of burrs, and turns out 1,000 barrels of flour per day.



## MILLER'S RECOIL CHECK FOR GUNS.


We illustrate a novel invention which is quite sure to be appreciated by soldiers, sportsmen, and all who handle firearms to any extent. Regulation rifles frequently kick with tremendous vigor, and there are few of our hunting readers who will not be able to recall lame shoulders and perhaps a few bad bruises, produced by the unexpectedly forcible recoils of their guns, especially in duck and pigeon shooting. The present device is intended to check this backward blow by neutralizing the same through the medium of a spring, and thus to admit of the use of much heavier charges in the piece and to insure steadiness of aim.

The exterior of the invention is shown in Fig. 1. From the section, Fig. 2, it will be seen that the hinged check plate, A, is applied to the lower part of the stationary butt

Fig. 1



Fig. 2



plate, and is guided by the portion, B, entering a suitable recess in the stock. Its outward movement is regulated by the flanged edge of said portion, B, which catches on the butt plate, as shown. C is a center pin on the check plate, which is surrounded by a coiled spring. The latter holds the device out from the butt, and also yields before the shock, thus breaking the force of the same, and rendering its effect upon the shoulder a mere push instead of a sharp blow. By means of the screw which holds the spring, the tension of the same may be regulated at will.

The invention is readily constructed, and may be applied to any gun. Patented through the Scientific American Patent Agency, November 3, 1875. For further information address the inventor, Mr. W. D. Miller, care of J. H. Johnston, Great Western Gunworks, Pittsburgh, Pa. A working model is on exhibition at the jewelry store at 843 Broadway, New York city.

## IMPROVED UNIVERSAL WHEELWRIGHT'S MACHINE.

We illustrate herewith a new universal wheelwright's machine, which is designed for planing the rims of vehicle wheels on three sides after said rims are driven on the spokes.

When the rim consists of short sections, it is necessary that each section shall conform to a circle greater than the circle of the wheel, so as to give a rise at the joints, which the tire will bind down, thus strongly arching and bridging these weak points. In order to produce this rise, the felloes are generally shaped out to the desired circle before they are driven on the spokes. They always, however, need redressing by hand, as the aforesaid work cannot be performed with sufficient accuracy to insure the meeting of the joints either on the periphery, the face, or the rear sides. It is also necessary to form the rim, when finished, thicker where it rests upon the spokes than under the tire. This labor, in common with the foregoing, has also heretofore been accomplished by hand. With the present machine the whole is quickly done in a single operation.


In construction the apparatus resembles a "two-sided sticker," having a horizontal and vertical mandrel with self-feeding arrangements. It has also a buzz planer table over the horizontal cutter head. Extending out from the front side of the machine is an arm, upon which suitable devices are mounted for carrying a self-centering chuck, in which the wheel is held by the point of the hub during the planing of the rim. To this chuck, a cam-shaped disk is attached, which has as many faces as there are joints or sections in the wheel rim. The wheel is fastened in the chuck, so that the joints in the rim correspond with the high points of the cam. The wheel now being elevated to the proper height by means of a screw, friction gears, and lever, it is

moved toward the machine, the chuck, to this end, being mounted on a collar, loosely fitted on a sleeve and having about ten inches to-and-fro play. The face of the wheel rim then resting over the horizontal cutter, the buzz planer table is lowered to give the required depth of cut, and the wheel is rotated and planed to a true face. The table is raised so as to taper out the cut gradually, leaving a true surface. The wheel and chuck are then moved back to allow the rim to clear the buzz planer, when they are both lowered until the rim rests on three stops. The operator now pushes the wheel toward the machine, the rim sliding under the horizontal cutter head and feed roller, and the periphery coming in contact with the vertical cutter, which is composed of bevel saws. The nut on which the chuck is mounted rests against a stop, preventing the movement of the wheel toward the machine. The feed roll then rotates the wheel, the horizontal cutter planes the rim to thickness and the required bevel, and the vertical head dresses the periphery.

The cam-shaped disk resting against a stop gives the wheel a vibrating motion to and from the vertical cutter head, by which the rise at the joints is produced. The wheel is so placed in relation to the line of the feed roll shaft that the latter is inclined to draw the wheel toward the machine, always keeping the cam against the stop, causing a uniform vibration. Bent rims are dressed to a true circle by removing the stop, so that no vibration whatever is imparted.

It is stated that with this machine the wheels are made with certain uniformity, that all ordinary material can be planed straight out of wind and square on the buzz planer table, and to thickness on the sticker table. A saw board or table, can be substituted for the buzz planer table, and a saw for the cutter head, when all kinds of straight sawing can be done. If it be desired to perform a still greater range of work, one of Messrs. Bentel, Margedant, & Co.'s universal wood-worker tables, with back top, bevel rest, gaining frame, etc., may be attached.

On the reverse side of the machine, a spoke-sawing wheel and a tenoning and boring apparatus is arranged, the whole of simple construction. The hollow auger is secured to the mandrel and carries a dished saw which, at one rotation of the wheel, saws off the spokes and bores the tenons. Wheels from 30 inches to 6 feet in height may, we are informed, thus be tenoned as desired. The change from a wheel tenoner to a boring or routing machine may be quickly made without the use of a wrench, and all kinds of boring may then be done. Two men may operate, on opposite sides of the machine, on different work at the same time. A horizontal shaper may be made of the rim planer which will shape, round, and corner all ordinary work. The capacity of the rim planer is 35 to 50 sets of wheels in ten hours; that of the wheel tenoner is much greater. The wheel tenoner

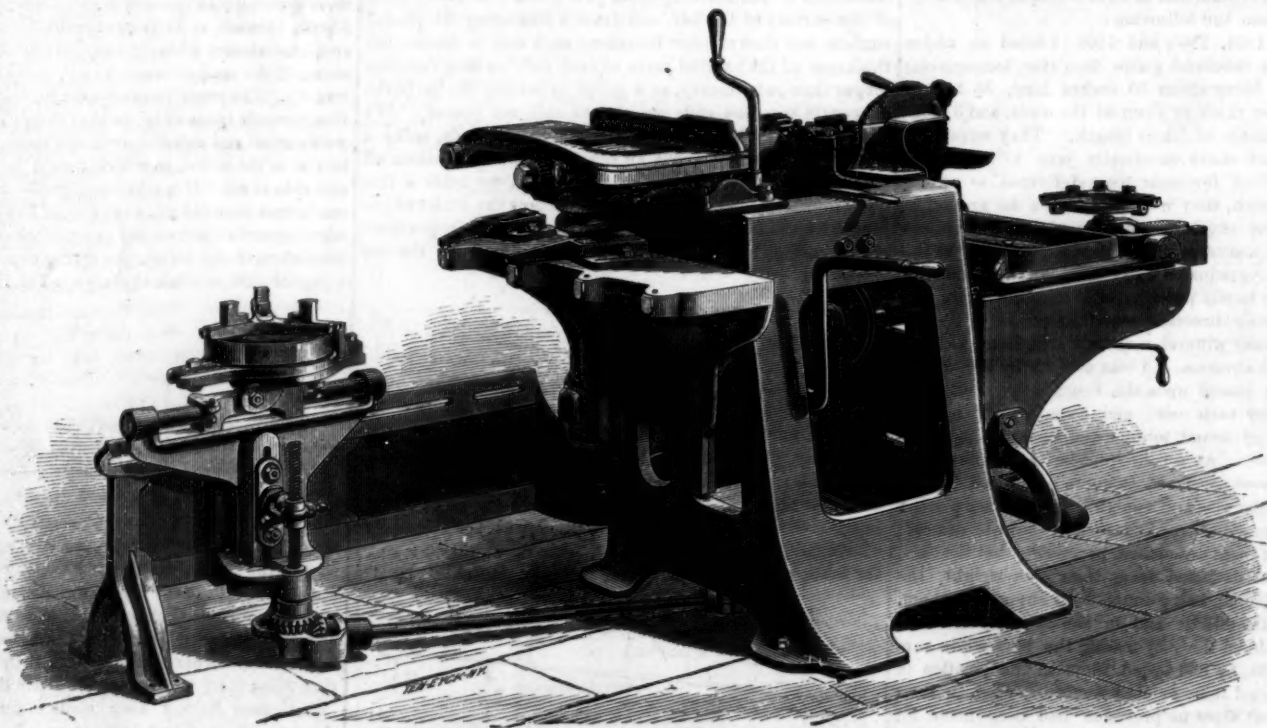

BUFFINGTON AND FORNEY'S WHEELWRIGHT'S MACHINE.


is, if desired, made separate, and with or without the boring attachment. The varied capabilities of the machine apparently fully justify its title of universal. In point of economy of room and in combining the functions of several usually distinct machines, the invention will prove one of much utility to wheelwrights and wood workers generally. Manufactured by Messrs. Bentel, Margedant, & Co., Hamilton, Ohio. For further information, address the patentees, Messrs. Buffington & Forney, Burlington, Iowa.

An article called fish flour has been brought forward in the last few years. The flour is prepared from dried fish, thoroughly desiccated, and then ground in a mill.

VON BULOW, the pianist, says beer drinking is the great fault of his countrymen. They do not get drunk, but drink till their blood becomes sluggish and their brains stupid.

## AMERICAN SILK-SPINNING MACHINERY.

It is estimated that 6,000 persons are employed and over \$10,000,000 capital invested in the extensive silk factories of Paterson, N. J. The process of silk making begins with the assortment of the skeins of raw silk, which are imported from Japan, Italy, China, and France; then follows washing in soap and water to get rid of the gummy material left by the worm, and then drying in an ingenious apparatus which throws out the water by centrifugal force. Winding next follows, when the silk is wound off from the skeins upon

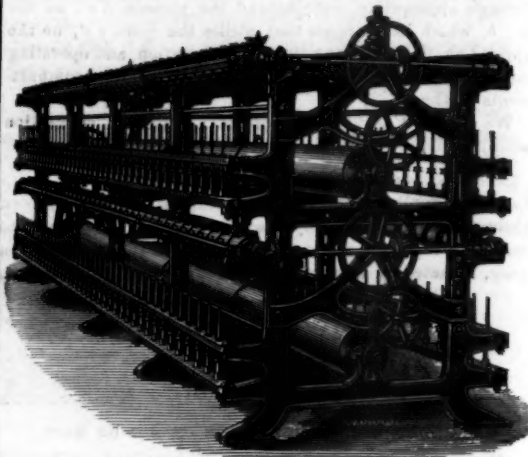

bobbins, after which the bobbins are taken to the doubling rooms, and there the silk from two, three, or four spools is wound together upon one. Finally the silk is spun, and this is done upon spinning frames of two or three stories and containing hundreds of spindles which revolve at a very high velocity.

The manufacture of these frames has recently been begun by the Danforth Locomotive and Machine Company, of Paterson, N. J., and numerous improvements have been added. We give herewith an engraving of the two story frame, which is adapted to either tram or organzine, and is made of any desired length and to contain any required number of spindles. The latter are adjusted with nicety, and are capable we are informed, of running at a speed of from 7,000 to 8,000 revolutions per minute without perceptible wear. The machine also has a longer drag than is usual, which gives the thread a better opportunity to become properly twisted, and thus free from the kinks or curls so annoying to silk manufacturers.

Silk making in Paterson, in Hartford, Conn., and in some localities in this city is an industry of which the growth has been more rapid than is generally realized throughout the country.

The exhibition of silk machinery of American production, which, it is promised, will be made at the Centennial, will, we believe, attract the attention of manufacturers the world over, and perhaps serve to emphasize the fact that already excellent silks of American make are found on the counters of the dry goods warehouses, in close and in some cases successful competition with those from celebrated foreign looms. It is very much to be regretted that a

recent conflagration in Paterson has destroyed a large amount of very fine silk machinery, including two large looms especially constructed for exhibition at the Centennial.

## New Mode of Illumination for Lighthouses.

Professor Batestrieri, of Naples, proposes for this purpose an apparatus composed of several disks of polished silver or copper, so arranged as to transmit successively the light received, so that all the rays falling upon the disks are concentrated into one powerful beam. The invention resembles the system of Fresnel, but the latter utilizes only about one third the light received, while M. Batestrieri's device, it is said, utilizes the greater portion. With an oil lamp having a burner 2-7 inches in diameter, at a test of the above described apparatus, a beam of light was transmitted which enabled a newspaper printed in ordinary type to be read at the distance of 0-6 of a mile.



## GREENHOUSES AND HOTHOUSES.

The long winter of our Northern and Middle States tries the patience of our gardeners, and renders doubly acceptable any hints and directions for the construction of greenhouses, wherein plants can be nurtured till the advent of spring; and where propagation can be carried on, so that a large supply of plants, both for flowers and fruit, may be ready for planting out as soon as the frost leaves the ground. Where the horticultural operations are extensive, the plan shown in our Fig. 1 is perhaps the best that could be adopted. The buildings can be constructed of any required size, and the heat is well confined to the back of the house by the brick wall. Flues are built in the wall with furnaces at the ends; or steam or hot water pipes are used for heating. Grape vines are usually trained under the sloping roof, and thus enjoy the maximum of light and sunshine. The wall is very handy in a fruit garden, even when not covered with glass. Fruit on trees trained against a brick wall (as shown on the left of Fig. 1) ripens much earlier; indeed, in England peaches and nectarines will hardly ripen at all in ordinary seasons unless the trees enjoy the reflected heat from a wall, which, by the way, should be painted black. Gardeners who devote much time to the cultivation of the

a bronze tazza, ornamented with well known decorative plants. The margin is fringed with *isolepis gracilis*, used expressly to tone down the harshness of the metal work. Two or three plants of the palm-like *curculigo*, says a correspondent of the *English Garden*, from the pages of which we select the engraving, are placed in the center; and these, by furnishing bold and graceful foliage, contrast well with the horizontal lines of the tazza below, while their cool and

streets and placed above the buildings, as in some cities, and we hope the time is not far distant when this desirable change will be made. As to underground wires, they cannot be easily worked, even when carefully insulated, on account of the interference of static induction. All telegraph wires, without regard to their position, are thus affected. But wires placed underground or in water are affected 50 times as much as those which pass through the air, the amount of the static charge in aerial wires being inversely proportional to the distance of the wires from the earth. The amount of the static charge in all telegraph wires, whether they are stretched through the air or buried under the ground, is proportional, also, to the length of the wire; and consequently an underground wire of half a mile to a mile in length may be worked without any inconvenience from the presence of the static charge, while one of greater length may give rise to the

Fig. 1



## RECENTLY CONSTRUCTED HOTHOUSES.

deep-toned greenness forms a pleasing contrast to the character of the stand itself. Heaths and similar hard wooded plants are added, and with good effect.


## Take the Poles out of the Streets.

Complaints are frequently made against the objectionable practice of the telegraph companies in placing their poles in

most serious trouble.

In London, all the railroads have stations centrally situated, most of the roads coming into the heart of the city. The South-Eastern Railway, for instance, has a station at Cannon street, which is only one third of a mile from the General Post Office, where the headquarters of the English telegraph lines are situated. Now, these telegraph wires are placed

Fig. 2

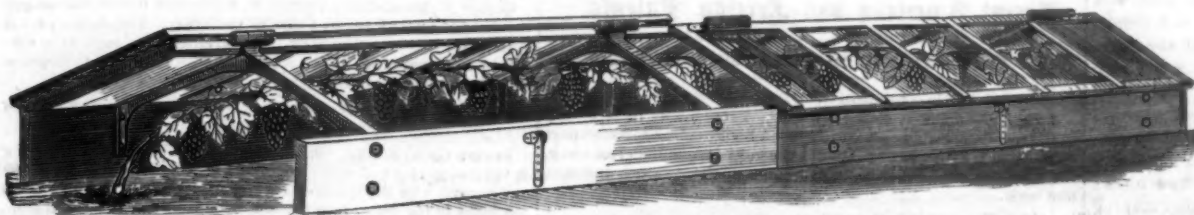

## GRAPE VINE AND HOTBED FRAMES.

grape will find the glass frames, shown in our Fig. 2, economical and efficient. The timber used in making them is small in quantity, and the glass is well placed to ripen the fruit. Air is readily admitted to the vines by raising the glass frames, the height of which can be adjusted by the attachment shown in the engraving, which displays the construction so clearly that no further explanation is necessary.

Another convenient form of glass frame is shown in Fig. 3; it is especially suitable for use on hotbeds. Being of little depth, the sun's heat is concentrated by the glass on the rich earth of the well manured bed; and the frames, which are well suited to cucumbers, melons, and early tomatoes, are so constructed as to slide open for purposes of ventilation.

Winter is the time when people are most apt to feel the need of a greenhouse; and if they do not construct one then, they usually get their plans perfected, and begin building in the early spring. We have published illustrations of more elaborate and expensive greenhouses than the one represented herewith; but we have seen none in which the arrangement is better, and the cost of construction less, than the one shown in Fig. 1. While Fig. 2 and 3 present no special novelty, they are each well adapted for the different purposes for which they are intended, and can be built cheaply.

## PLANT VASES FOR INDOOR DECORATION


The votaries of floriculture are now turning their attention indoors, and inquiries as to proper and tasteful modes of parlor and dinner table decoration are beginning to reach us. The usual way of keeping plants in houses is to place them in vases or tazzas, of wood or pottery, although some are now made in bronze or iron, of very handsome designs; terra cotta is also employed, and, although cheaper than metal, is capable of equally effective ornamentation. Filled with a light earth, and covered with the moss called sphagnum, hardy and half hardy plants will thrive well in these vases; care must, however, be taken not to water them too profusely, as (there being no way of escape through the bottom of the vase for superfluous water) too much moisture will rot the roots.

The accompanying illustration represents



## ORNAMENTAL PLANT STAND.

Fig. 3.

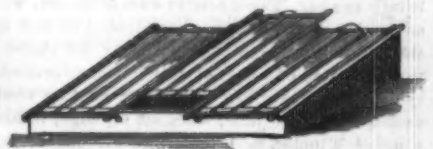

the streets of cities; and the popular belief is that the wires ought to be put underground. It is true that the main streets of New York are sadly disfigured by the clumsy wooden poles, and probably no improvement can be expected until we have a better city government. But the idea that it would be easily practicable to work the wires underground is a mistake. They could, however, be taken out of the

on poles and follow the lines of the railroads into the stations, where they first pass under ground, running as subterranean lines only from the railroad termini to the central telegraph station. Hence, the quantity of underground wire in London is comparatively small. In addition, it may be stated that in all parts of the city there are certain large distributing telegraph offices which are connected by wires with all the sub-stations in the city—of which there are 400 to 500—and every wire from each of these distributing offices to the several hundred sub-stations is carried over the house tops; where there are several wires running to the same station, they are insulated on poles which are fastened to the tops of houses. In addition to those that have been mentioned, there are in London 800 private lines, running to all parts of the city. They use what are known as the Wheatstone dial instruments. There is not a single rod of wire working all these instruments that is under ground, the wires all being carried over the house tops. Frequently 40 to 50 insulated wires are made into a single cable, which is suspended on fixtures attached to the roofs of houses.

In 1854 a telegraph company was organized in England which constructed an underground line between London and Liverpool, 210 miles, the cable containing 10 wires. But in less than two years after the line was built, its insulation became so much impaired that the company was obliged to take up and replace a considerable portion of the cable. One wire after another still continued to fail, until there were only five of the ten that would work at all. After this, as others failed, sections of the underground line were abandoned, and wires placed on poles were substituted, until, finally, so much of the underground system had failed that the company decided to place the whole line on poles. The copper and gutta serena which constituted the valuable portion of the underground cable were taken up and sold for enough to replace the whole system with a good overland line. All similar lines that were ever constructed in England have been abandoned, except one of thirty miles, constructed by the government nearly three years ago as an experiment, which is the only line outside of the cities.



In like manner, says Mr. G. B. Prescott, 20,000 miles of underground lines in England, France, and Germany have been abandoned. In the city of New York there are over 5,000 miles of telegraph wires in operation, four fifths of which are used for local communications, stock-reporting instruments, and private lines.

If a law should be passed compelling the companies to place their wires underground, the whole system of communication would have to be changed. But, even were it practicable to work our system upon the underground lines, it would be impossible to place all the wires in the city of New York lone underground in less than four or five years.

#### The Manora Breakwater.

At a recent meeting of the Institution of Civil Engineers, the paper read was on "The Manora Breakwater, Kurrachee" (the design for which was illustrated on page 99 of volume XXVII. of the SCIENTIFIC AMERICAN), by Mr. William Henry Price.

It was stated that the Manora Breakwater was the most important feature of the Kurrachee Harbor Works, which were commenced in 1860, from the design of the late Mr. James Walker, assisted by Mr. William Parkes. Besides the breakwater the chief works were: In the lower harbor, a stone groyne 8,900 feet long, dredging and removal of rock; and in the upper harbor, an increase of one fourth to the area of the backwater, involving a new tidal channel 2½ miles long, crossed by a screw pile bridge 1,300 feet long, and an embankment 2,780 feet long, to close the old channel, also of a jetty 1,400 feet long, with quays. All these works were now nearly completed, and had already produced great benefit, the entrance having been made direct instead of circuitous, deepened 6 feet and sheltered, the anchorage space enlarged, and the internal accommodation improved. The trade of the port was \$17,500,000 per annum, and railway communication with the Punjab would further develop it. About \$2,250,000 had been expended on the whole of the harbor improvements.

The Breakwater projected from Manora Point for a length of 1,503 feet, into a depth of 5 fathoms of water, in order to shelter the entrance from the southwest monsoon seas, and to prevent their tearing up sand from the bottom and depositing it as a bar. The characteristics of the sea, wind, and tides, as bearing on the design, were alluded to, and it was stated that the bottom was irregular near the shore. The structure consisted of a base of rubble stone, leveled off generally to 15 feet under low water; and on this concrete blocks, each weighing 27 tons, were set on edge, leaning back at a slope of 3 inches to 1 foot, and without bond, two blocks forming the width and three the height, and together making a square of 24 feet in cross sections, the top being about the level of high water. The rubble base was deposited from native boats, and was leveled for the superstructure by helmet divers. Two European mason divers were employed, and six native divers trained on the work, the latter chiefly for shifting the rubble. No accident occurred, and the party generally did not suffer in health. After mentioning circumstances which determined the use of concrete blocks and of Portland cement, particulars were given of the composition of a 37-ton block, the materials being cement, river sand, shingle, and quarry lumps, with salt water. The ratio of the bulk of the cement to that of the finished block was nearly 1:1. About 8,500 tons of cement were used. The mixing station, block ground, and molding of the nineteen hundred and seventy-two blocks, including three hundred and twenty-five of special smaller sizes, were then described; and it was remarked that the Messent mixers had been found very efficient. The blocks were sometimes used one month after being made, and once, as an experiment, a 27-ton block was safely lifted in seven days. When the work was fairly established, the blocks cost for current expenses \$3.75 per cubic yard, though the average total rate was raised beyond this by extra expenses in the earlier stages.

The blocks were lifted on to the trucks by a steam hydraulic traveling crane of 50 feet span; each truck carried one block, and was taken separately by a tank locomotive to the breakwater. The blocks were set by a steam traveling crane, called the Titan, which ran on rails laid on the finished work, and overhung the end, so as to carry the blocks of three tiers in advance to their places, thus dispensing with staging. The framing of this crane supported a traveler and crab, worked by an 8-horse power engine on the top, which also drove the traveling gear of the entire machine. The cost of the Titan, delivered and erected at Kurrachee, was \$14,895. The rate of setting was limited by the progress of the foundation and by the supply of blocks, but during the last season ten 27-ton blocks were set daily on an average, while on one occasion six blocks were laid in one hour and forty minutes without special pressure.

The base was commenced on the 17th of March, 1869; and later in that year the shore end stump, 45 feet long, to make a starting place for the Titan, with other preparatory works, was completed, after some unavoidable delays, and the first block was set on the 1st of November, 1870. The delays of the foundation were merely felt in the first season's work, but a length of 225 feet was built in four months, taking the breakwater out to 270 feet from the shore. During the second season, 1871-72, after a few days spent in repair of monsoon damages, a length of 533 feet was built in about four months, making a total of 793 feet. During the third season, after the repair of monsoon damages, a length of 710 feet was built, completing the breakwater on the 22nd of February, 1873, to its full length of 1,503 feet, which had thus been barely twelve months in actual building.

The action and effect of the monsoon sea, and the repair of damages, were then detailed. In 1871 the center joint

opened here and there, and one block was over from the top course on the harbor side. Slight damage also occurred to the shore end in the sea angle. The nature of the settlement was described, also a curious rocking action, and the closing up of the cross joints under the action of the sea. The repairs of the damage, in the first season, cost \$925. During the second monsoon, 1872, twenty-five blocks were washed out from the top course on the harbor side, eighteen of these block being, in one length, 86 feet. The damage was again traceable to inequality of settlement. The sea side did not suffer, nor did the shore end, though both showed evidence of the force of the sea. The damage was repaired in a few days at a cost of \$2,560. The monsoon of 1873, the first after the completion of the breakwater, did trifling damage, and was confined to the shore half length, still pointing clearly to weakness of foundation. The repairs cost \$995. In the monsoon of 1874, the outer end and scar, which had not then been in any way specially secured, lost five blocks during unusual weather, though no other part of the outer half length suffered, but the shoreward half opened here and there. The repairs of this season cost \$2,090, and included the re-erection of an iron beacon on the outer end. The nature and extent of the subsidence (which in some parts amounted to 3 feet, but without dislocation), were then noticed, also the action of a mollusk, the pholas, on the concrete blocks, and the effect of the sea on the rubble base, which did not, however, affect the stability of the superstructure.

The cost of the breakwater had been \$467,825, or \$311.25 per lineal foot, but this amount included preliminary charges, the current expenses during the last season being only \$170 per foot. This sum included the repair of damages during the progress of the work, and during the two monsoons since its completion, but not the expense of engineering and office establishment. The work had been carried on in the Bombay Public Works Department by the author and his assistants, advised by Mr. William Parkes, as consulting engineer, and without employment of any general contractor. The completion of the work was favorably noticed by all the government authorities concerned.

#### Recent American and Foreign Patents.

##### NEW CHEMICAL AND MISCELLANEOUS INVENTIONS.

###### IMPROVED HORSE-HITCHING DEVICE.

John Schoonmaker, New York city.—This consists in attaching to the reins rings which are caught upon hooks on the forward part of the wagon body, so that, should the horse attempt to run away, the whole weight of the wagon will come upon his mouth and hold him back.

###### IMPROVED STILL.

Henry Deymann and Edward Melchers, Toledo, Ohio.—This inventor proposes an improved column for refining stills, in place of the so-called French column, so that a finer spirit, with less steam pressure, is produced by means of simpler construction, which prevents leakage, decreases the trouble and expense connected with the repairs of the French column, and which may be put in the space of one story, with a considerable saving in copper plate. The essential features consist in arranging the chambers of the columns, on opposite sides thereof, with alternating horizontal and vertical partition plates and connecting overflow pipes and draining stop cocks. The intercommunicating arrangement of the chambers virtually produces two columns in one, so as to require about half the height and material only, and offers the advantage of having all the overflow pipes at the outside.

###### IMPROVED INKSTAND.

Herman Schirmer, Wheeling, W. Va.—This is an ink vessel with an inverted conical tube extending nearly to the bottom of the vessel, and having an orifice at the lower end in connection with an air regulating device by which the height of the ink in the tube is regulated.

###### IMPROVED PHOTOGRAPHIC PLATE HOLDER.

Frank A. Howson and William S. Howson, Brooklyn, N. Y.—This is an improved combination holder for the ground glass and plate for photographic cameras, by which, in every case, the exact image that was focused on the ground glass is obtained with perfect certainty on the sensitized plate. By its use the ground glass door of the camera may be dispensed with. The device is provided with lower grooved glass holders, glass buttons or studs at the top, and a side support, on which the ground glass and plate are insulated, and securely fastened by a spring top plate.

###### IMPROVED MONUMENT.

John N. Wallis, Fleming, and Theodore Wallis, Scipio, assignors to themselves and James A. Moore, Auburn, N. Y.—This inventor proposes grave-stones of a more tasteful form than those commonly used. He suggests making the monuments of stone and glass, having inclosed chambers for the preservation of flowers and other objects.

##### NEW HOUSEHOLD ARTICLES.

###### IMPROVED CURTAIN FIXTURE.

William H. Maine, Abington, Mass.—This is a spring curtain roller provided with a device for preventing the unwinding of the spring when the roller is removed from the brackets. A spiral roller spring acts on a spindle, revolves the same, and throws a pin instantly out of its seat against a cam of a sleeve, so as to retain the spindle and prevent the unwinding of the spring. The roller thus remains in locked position as long as it is out of the brackets, and is instantly available for use when replaced in the brackets.

###### IMPROVED COMPOSITION FOR SOAP.

William F. Darnoby, Nashville, Tenn., assignor to himself and Edward B. Stahlman, of same place.—This compound, the inventor states, is an excellent article both for laundry and toilet, and is very cheap. It is made of Kirk's double extract, Colgate's soda soap, sal soda, water, spirits of ammonia, ether, and oil of sassafras.

##### NEW AGRICULTURAL INVENTIONS.

###### IMPROVED CHECK-ROW ATTACHMENT FOR CORN PLANTERS.

George C. Flagg, Columbus, Ill.—This includes several new and ingenious devices, so constructed that wheels mark the rows in one direction and marker arms mark it in the other direction. The machine is so guided that the ends of the inner markers may meet, or nearly meet, the ends of the marks made by the outer markers upon the previous crossing, so that the ground is marked in accurate check row by the machine crossing the field in one direction.

##### NEW MECHANICAL AND ENGINEERING INVENTIONS.

###### IMPROVED CAR COUPLING.

Oscar E. Ford, Meridian, Miss., assignor to himself and Min or B. Clinton, Dallas, Tex.—This coupling consists of drawheads with forward-projecting parts, which are recessed at their inner sides, and provided with laterally sliding spring-acting jaws that interlock by the entering of the projecting parts of the drawheads into the space formed by the shorter part. The drawheads are thus firmly connected without chance of getting detached, while the jaws have play in vertical direction by the widening of the recesses at the rear part, which allows the coupling of cars of different heights.

###### IMPROVED CRANK STOP.

William H. Phillips, Bridgeton, N. J.—The cranks of windlass and other shafts have been heretofore disconnected by the backward rotation of said shafts, but the shafts required to rotate several times in order to effect such result. This inventor effects the disconnection at the first backward rotation of the shaft, and to this end provides a pivoted catch, which engages a sliding piece that locks the crank to the shaft.

###### IMPROVED SPARK CONVEYER.

Charles K. Cullers, Bunceton, Mo.—This device is principally a kind of ball-and-socket joint for connecting the sections of pipe for conducting the smoke for the locomotive back along the top of the train to the rear end, the said joint being free to oscillate to any required extent, and allowing the necessary contraction and extension of the pipe, and at the same time keeping tight.

###### IMPROVED SADIROON SHOE.

Victor C. Thebaud, Buffalo, N. Y.—A large number of inventions are in existence for getting rid of the unnecessary weight of metal in flat irons, most of which accomplish their object by abolishing the fixed handle and substituting an adjustable one which will serve for several bodies. The present inventor suggests a very different plan, and proposes a shoe for the iron, which is easily attached and replaced at will, so that an effective ironing surface is always obtainable. The device is made with external flange, having curved side extensions at the front and a fastening screw at the rear part to be readily applied to the iron.

###### IMPROVED TREADLE FOR MACHINERY.

Andrew N. Hagerty, West Alexander, Pa.—This is an auxiliary treadle and connecting rod, in combination with the main treadle and connecting rod, to work a pawl for starting the machine by a ratchet wheel. The object is to insure the turning of the machine in the right direction, and to avoid the necessity of starting the balance wheel by hand, thus leaving both hands free for managing the work.

###### IMPROVED RAIL JOINT.

George A. Mead, Salem Center, N. Y.—In this device, the tongue or tenon of one rail enters a slot in the other. The slotted part is bolted together by a couple of bolts arranged the same as in fish-plate joints. The object is to make an endless joint, and to dispense with the fishplate commonly used.

###### IMPROVED WATER REGULATOR AND INDICATOR FOR STEAM BOILERS.

Dexter Cook, Elmira, Ohio.—This is a cylindrical tank traveling in vertical guides and supported by a spring. It is connected at top and bottom with the steam and water spaces of the boiler. When the water in the boiler falls below a certain level, the tank, becoming lighter, is raised by the spring, and the fact is indicated by a graduated scale and pointer and by a whistle allowed to sound by mechanism connected with the tank. The latter is also connected with a feed valve, so as to open the same, and thus allow water to enter the boiler when a deficiency is indicated, and closes the valve when the level is reached.

###### IMPROVED FEATHERING PADDLE WHEEL.

Peter Gregerson, Waukegan, Wis., assignor to himself and Phillip Miller, same place.—The paddles are hung by pivots above their centers, and are held to their work by stops. The latter are controlled by sliding rods which, acted upon by a cam on the wheel shaft, push said stops beyond the outer edge of the paddles, and then retract them by springs. There are other devices which allow the cam to shift right or left, as the wheel is turned in either direction, and an ingenious mechanism is provided for purposes of adjustment.

###### IMPROVED GATE.

Robert Samuel Rinker, Mount Jackson, Va.—The object of this invention is to provide an improved automatic or self-opening gate; and it consists in an arrangement of elbow levers and catch hooks, controlled by a cord or wire, with a weighted lever, upon one end of which lever the wheels of the vehicle pass to raise the weight and set the gate, so that it can be readily opened from either side by the person in the vehicle by pulling a tripping cord, arranged upon both sides of the gate, within convenient reach, upon a post, each vehicle serving to raise the weight and set the gate for the next succeeding one.

###### IMPROVED BLICK KILN.

Holland B. Evans and Earnest G. Kemper, St. Charles, Mo.—The invention relates to a new construction and arrangement of the several compartments of the kiln and their flues, which cannot be made plain without the aid of drawings. In general the flues are so made that their heat can easily be controlled, and by using the invention it appears that as many more bricks as are contained in the compartments can be burned with the same or less amount of fuel than with a kiln of the same dimensions constructed in the old way.

##### NEW WOODWORKING AND HOUSE AND CARRIAGE BUILDING INVENTIONS.

###### IMPROVED RECORDING AND SIGNAL FARE BOX.

Edward Henry Schnell, South Norwalk, Conn.—Another machine for enforcing honesty in car conductors is a recording and alarm fare box, in which the record is made by punctures or slits formed in a piece of paper at the same time that the signal is sounded. There is also a separate compartment in the case of the instrument for depositing tickets as they are collected by the conductor, with a door which only opens when the signal and recording devices are actuated. So that in order that the tickets shall agree with the record the conductor is obliged to collect and deposit all the tickets.

###### IMPROVED BARREL.

Leslie E. Sunderland, Williamsburg, Va.—The object of this invention is to provide a barrel for the shipment of produce, which shall be capable of transformation after the said produce is delivered, so as to occupy a comparatively small space, and be returned to the sender at the rates of solid freight and at a comparatively trifling cost. It consists in a series of staves, connected by hoops which have peculiar fastenings, which adapt the staves to be disposed flat for return transportation, or rolled up and fastened to form a barrel. The sides of the barrel are straight, and the heads are held in place by lugs alternating, when the barrel is set up upon opposite sides of the head. The heads are thus of less diameter than the inside of the barrel, so that the barrel, when returned, may be packed full of heads, and the rest of the barrel sides packed flatly together.



## Business and Personal.

The Charge for Insertion under this head is One Dollar a Line. If the Notices exceed Four Lines, One Dollar and a Half per Line will be charged.

"Wrinkles and Recipes" is the best practical Handbook for Mechanics and Engineers. Hundreds of valuable trade suggestions, prepared expressly by celebrated experts and by correspondents of the "Scientific American." 250 pages. Elegantly bound and illustrated. A splendid Christmas gift for workmen and apprentices. Mailed, post paid, for \$1.50. Address H. N. Mann, Publisher, P. O. Box 773, New York City.

All Split-Pulleys weighing over 50 Pounds at the same finished price as Whole-Pulleys. J. Yocom's Foundries, Drinker St., below 147 N. 2d St., Philadelphia, Pa.

Valuable Patent for Sale. Address Box 124, Manchester, N. H.

For Sale—State and County Rights for an excellent Patent Wash Boiler. Address, for further information, F. G. Macklin, Richmond, Fort Bend Co., Texas.

Hearing Restored—A great invention by one who was deaf for 20 years. Send stamp for particulars to Jno. Garmore, Lock-box 30, Madison, Ind.

H. A.—The Brayton Gas Engine, made by Ready Motor Co., 24 Cliff St., N. Y., will probably answer your purpose.

A Valuable Patent for Sale, Territory U. S.—Address Charles E. Canan, Richmond, Union Co., Ohio, P. O. Box 406.

Designing Belt Gearing. By E. J. C. Welch. 12mo, 16 pp., price 20 cents. Send stamp for Catalogue of Scientific Books. R. & F. N. Spon, 446 Broome St., N. Y.

"Geo. P. Rowell & Co. are the largest advertising agents in the world."—Journal and Recorder, West Meriden, Conn. "The success of this firm is truly wonderful, and yet not so, either, when we take into consideration their honorable manner of transacting business. We truly wish that all of our foreign advertising might come through them, as it would be a saving to the advertiser and advantageous to ourselves."—Journal, Adams, N. Y.

Notice—Advertisement of Special Sale of Westcott's Patent Chuck. R. E. State, Springfield, Ohio.

See 1/2 of valuable tobacco patent for sale, in our advertising columns.

The attention of those interested is called to the Varnishes of the London Manufacturing Co. For durability and finish, they are unequalled. 346 Grand Street, New York.

Sewing Machine Patent for Sale—Will either receive proposals for making on Royalty, or a partner with Capital to place it on the market. Address George W. Hoffman, Fielding Station, DeKalb Co., Ill.

Amateurs and Artisans, see advertisement, page 413. Fleetwood Scroll Saw, Trump Bros., Manufacturers, Wilmington, Del.

We want a Die Sinker, one experienced in Drop Forging. Steady work and good pay. The Hull & Beldea Company, Danbury, Conn.

For Sale—2d hand Portable Engines, thoroughly repaired, 4 H.P., \$300; 8 H.P., \$400; 10 H.P., \$450; 15 H.P., \$550; and bran new 5 H.P., \$375. Shearman & Hilles, 45 Cortlandt St., New York.

For a Self-Acting Trap, to rid out all Rat and Animal Creation, address John Dilline, Limestoneville, Montour Co., Pa.

Wanted—The best Mill Machine. Send full particulars to F. C. Tucker, 354 W. 3rd St., New York.

Hotchkiss Air Spring Forge Hammer, best in the market. Prices low. D. Frisbie & Co., New Haven, Ct.

A Bargain—A set of Scientific American, from Vol. 5, Old Series, to Vol. 31, New Series—1877 to 1899—30 Vols., well bound, for \$80. Address A. F. R., Box 773, N. Y.

Williamson's Tannate of Soda removes and prevents Scale in Boilers. 25 lb. boxes, 25 cents per pound, C. O. D. D. D. Williamson, 268 West St., New York.

Water, Gas and Steam Goods—Send eight stamps or Catalogue, containing over 400 Illustrations, to Bailey, Farrell & Co., Pittsburgh, Pa.

For automatic Twist Drill Grinding Machines, address C. Van Haagen & Co., Philadelphia, Pa.

Hand Fire Engines, Lift and Force Pumps for fire and all other purposes. Address Rumsey & Co., Seneca Falls, N. Y., U. S. A.

Electric Burglar Alarms and Private House Annunciators; Call, Servants' & Stable Bells; Cheap Teleg. Insts.; Batteries of all kinds. G. W. Stocky, Cleveland, O.

Single, Double, and Triple Tenoning Machines of superior construction. Martin Buck, Lebanon, N. H.

Gothic Furnace, for coal and wood, heats houses & churches. Send for book. A. M. Lesley, 236 W. 2d St., N. Y.

For best Presses, Dies, and Fruit Can Tools, Bliss & Williams, cor. of Plymouth and Jay, Brooklyn, N. Y.

For Solid Wrought-Iron Beams, etc., see advertisement. Address Union Iron Mills, Pittsburgh, Pa., for lithograph &c.

Hotchkiss & Ball, Meriden, Conn., Foundrymen and workers of sheet metal. Fine Gray Iron Castings to order. Job work solicited.

For Sale—Second Hand Wood Working Machinery. D. J. Lattimore, 51st & Chestnut St., Phila., Pa.

Price only \$3.50—The Tom Thumb Electric Telegraph. A compact working Telegraph Apparatus, for sending messages, making magnets, the electric light, giving alarms, and various other purposes. Can be put in operation by any lad. Includes battery, key, and wires. Neatly packed and sent to all parts of the world on receipt of price. F. C. Beach & Co., 346 Canal St., New York.

Pock's Patent Drop Press. Still the best in use. Address Milo Pock, New Haven, Conn.

All Fruit-Can Tools, Ferracute Wks., Bridgeton, N. J.

American Metaline Co., 61 Warren St., N. Y. City.

Genuine Concord Axes—Brown, Fisherville, N. H.

For Solid Emery Wheels and Machinery, send to the Union Stone Co., Boston, Mass., for circular.

Faught's Patent Round Braided Belting—The Best thing out—Manufactured only by G. W. Army, 148 North 3d St., Philadelphia, Pa. Send for Circular.

For best Bolt Cutter, at greatly reduced prices, address H. B. Brown & Co., New Haven, Conn.

Diamond Tools—J. Dickinson, 64 Nassau St., N. Y.

Magic Lanterns and Stereopticons of all sizes and prices. Views illustrating every subject for Parlor Amusement and Public Exhibitions. Pays well on small investments. 72 Page Catalogue free. McAllister, 49 Nassau St., New York.

Temples and Oileans. Draper, Hopdale, Mass.

The "Scientific American" Office, New York, is fitted with the Miniature Electric Telegraph. By touching little buttons on the desks of the managers, signals are sent to persons in the various departments of the establishment. Cheap and effective. Splendid for shops, offices, dwellings. Works for any distance. Price \$6, with good Battery. F. C. Beach & Co., 346 Canal St., New York, Mass. Send for free illustrated Catalogue.

Hydraulic Presses and Jacks, new and second hand. Lathes and Machinery for Polishing and Boring Metals. E. Lyon, 470 Grand Street, New York.

Spinning Rings of a Superior Quality—Whitinsville Spinning Ring Co., Whitinsville, Mass.

Solid Emery Vulcanite Wheels—The Original Solid Emery Wheel—other kinds imitations and inferior. Caution—Our name is stamped in full on all our best Standard Belting, Packing, and Hose. Buy that only. The best is the cheapest. New York Belting and Packing Company, 37 and 39 Park Row, New York.

The Baxter Engine—A 48 Page Pamphlet, containing detail drawings of all parts and full particulars, now ready, and will be mailed gratis. W. D. Russell, 18 Park Place, New York.

## Notes &amp; Queries

H. M. D. will find directions for making a fireproof artificial stone on p. 113, vol. 24.—M. H. can fasten emery to wood by the method for emery and iron, described on p. 363, vol. 33.—H. J. will find directions for making nitro-glycerin, duralin, dynamite, etc., on p. 212, vol. 33.—H. F. S. can brown his gun barrels by using the recipe given on p. 11, vol. 33.—F. F. will find a recipe for stove blacking on p. 57, vol. 25.—T. should French polish his pianoforte work. See p. 11, vol. 22.—M. H. K. will find a recipe for white fusible metal on p. 374, vol. 33. The process of repairing delivelled mirrors is described on p. 346, vol. 33.—S. N. will find directions for staining glass on p. 300, vol. 30; for etching glass, on p. 379, vol. 33.—H. A. S. will find directions for making clarified cider on p. 304, vol. 33; for preserving cider, on p. 139, vol. 33.—S. & B. will find on p. 139, vol. 33, directions for making paste that will probably answer their purpose. As to State laws regulating the sale of patents, see p. 187, vol. 33.—S. T. S. can mold rubber by following the directions on p. 298, vol. 30.—W. T. can clean shells by the method described on p. 122, vol. 27.—H. D. M. will find a recipe for Rabbitt metal on p. 26, vol. 33.—C. B. will find directions for silvering glass on p. 340, vol. 33. Full directions for nickel plating have frequently been published in these columns. See pp. 155, 235, vol. 33. This also answers E. J. C.—R. R. M. can make a mold, for use on type, of plaster of Paris. The metal that is lightest in water is the lightest out of water.—B. H. C. will find full directions for putting a white enamel on iron on p. 362, vol. 33. This also answers A. F.—C. S. F. will find an account of the oleomargarin process on p. 23, vol. 33.—P. D. K. can fasten rubber to iron by the method given on p. 43, vol. 25, for leather. A good recipe for paste that will keep is published on p. 219, vol. 30.—D. G. F. will find a description of the phosphorus lamp on p. 10, vol. 27.—V. can read the inscriptions on coins by following the directions on p. 346, vol. 26.—H. G. W. will find directions for making spongy platinum on p. 330, vol. 25.—H. N. M. can cement glass to brass by the method described on p. 1, vol. 33.

(1) N. S. asks: How can I unite the mercury in a thermometer which has become separated by agitation? A. Fasten a string 3 or 4 feet long to the instrument, and swing it round your head. The centrifugal force will cause the mercury to unite.

(2) R. F. L. asks: How can I stick leather on the face of iron and wood pulleys? A. Glue the leather to the wooden pulley. Paint the iron pulley with a good coat of white lead in oil, and let it dry; then glue the leather on.

(3) L. B. asks: What is black rosin, and is it known by any other name? A. Black rosin is also called colophony, and is the residue left after the distillation of turpentine.

(4) H. L. M. asks: How can I get a white metal that will flow perfectly into an iron or brass mold, and which, when turned out, will stay bright? A. Melt together 4 1/2 lbs. of tin, 1 1/2 lb. bismuth, 1/2 lb. antimony, and 1/4 lb. lead. This alloy fuses at a low temperature and does not tarnish.

Can the color be taken out of horsehair, so as to make it white? A. Wash in weak lye, and fumigate with the vapor of burning sulphur (sulphurous acid).

(5) G. G. B. asks: What do pattern makers use to blacken their patterns with? A. Lamp black mixed with copal varnish and alcohol.

(6) J. N. J. asks: Why do iron and steel weld with less heat than without borax? A. The use of borax is as a flux, to make the steel heat evenly, and to prevent the corners or edges from burning before the rest of the metal is of the proper heat.

(7) M. D. F. asks: How can chilled iron be drilled? A. By hardening the drill in mercury instead of water.

(8) C. R. asks: What pressure per square inch is required to crush pieces of ice together so as to form one clear homogeneous mass? A. Consult Professor Tyndall on "Forms of Water."

(9) J. H. asks: In what quantity, and at what intervals, should quinine be taken as a remedy for chills and fever? A. In many cases two grain doses are recommended to be taken before each meal, whenever an attack of chills is anticipated.

(10) E. C. & Co. ask: Would it be beneficial to soft maple lumber, for building a large friction pulley, to boil it in olive oil? A. Yes. 2. Would it harden the timber, and make it less liable to split? A. Yes. 3. Would the gear slip more after such treatment? A. Yes.

(11) H. A. S. asks: How is bromide of camphor made? A. Triturate the camphor first with a drop or two of dilute spirits of wine, and then digest with bromine water. The bromine unites with the camphor to form an unstable bromide of camphor, which is crystalline, and is decomposed by heat, by contact with air, and by action of ammonia.

(12) D. C. G. asks: Is there any preparation of phosphorus, either fluid or dry, that is luminous in the dark when hermetically sealed? A. A full description of the phosphorus lamp will be found on p. 290, vol. 33. It consists of a strong solution of phosphorus in olive oil. The solution is kept in a small, glass, stoppered bottle, and when required for use the cork is removed and the solution agitated.

(13) W. J. H. asks: What would be the difference between suspending a weight (that works such machinery as clockwork) direct, and hanging the same weight around a pulley attached to weight? Would there be any difference in effect upon the train of wheels, providing the amount of pressure on drum (not the weights) were same in both cases? A. Neglecting friction and rigidity of cordage, if the weight required in the second arrangement were 100 lbs., that in the first need only be 50 lbs.

(14) T. D. W. If two persons are in a top wagon, about 500 lbs. weight rests upon the two axles, which are as stiff as they are usually made. Now if the axles can be made 2 1/2 times as stiff, how many lbs. will the change take away from the load drawn by the horse? A. The question is rather indefinite, but we do not imagine that there would be much difference in the two cases.

(15) C. P. asks: How many lbs. strain will there be on a rope which has a horse at each end, pulling in opposite directions, supposing each horse to be pulling 1,000 lbs.? A. One thousand lbs. This question is anything but new. See p. 186, vol. 24.

(16) M. R. asks: Is centrifugal force of a wheel in motion a radial or a tangential one? A. Radial, as we understand your question, that is, in the direction of a radius.

(17) J. G. says, in answer to N. K. B.'s query as to the area of a polygon: If A be the area of the circle and P the perimeter of the regular polygon, the area of the latter is

$$\frac{P}{2} \sqrt{\frac{A}{P^2} - \frac{1}{4n^2}}$$

being the number of sides which must be given. If these be given, A and P, as before, and B, the area of the regular polygon, the number of sides =

$$\frac{2A}{P^2 - 4B^2}$$

(18) S. says, in reply to W. J. E., who is troubled with dreams: If you abstain from sleeping on your back you will not dream. It is very rare that a person who is not laying on his back dreams.

(19) L. C. Jr. says, in reply to H. J. E., who asked how to apply wax to stove patterns: As the stove plates of to-day are more or less ornamented with designs, having well defined depressions or elevations, the casting must be heated till it is hot enough to melt the beeswax and not burn it. Then apply the wax by rubbing it here and there over the surface of the plate; a small quantity only is required. After which, and while the wax is in a liquid form, give the casting a thorough brushing with a new shoe brush; this will spread the wax uniformly over the entire surface and at the same time remove all the surplus wax. Then allow the casting to cool, and, with a second shoe brush, give it a thorough brushing, and you will have a surface to your pattern that will give you a mold with as sharp corners as your pattern.

(20) W. J. R. says, in answer to T. D.'s inquiries as to compound gears: I judge from T. D.'s list of gears and pitch of lead screw that he has got a Pratt & Whitney lathe, which, unlike most other lathes, has, on the inside gear on the stud, double the number of teeth that the cone gear has. Therefore, with gears on stud and screws having the same number, the revolutions of cone and screw will be as 2 to 1, and the pitch of lead screw is made practically 16 instead of 8. The SCIENTIFIC AMERICAN's rule will work by counting the screw as 16. The following index is useful for T. D.'s lathe:

Thread.	Stud.	Screw.	Thread.	Stud.	Screw.
2	4	112	28	56	112
3	6	168	36	72	168
4	8	224	48	96	224
5	10	280	60	120	280
6	12	336	72	144	336
8	16	448	96	192	448
10	20	560	120	240	560
12	24	672	144	288	672
14	28	784	168	336	784
16	32	896	192	384	896
20	40	1120	240	480	1120
24	48	1344	288	576	1344
28	56	1568	336	672	1568
32	64	1792	384	768	1792
36	72	2016	432	864	2016
40	80	2240	480	960	2240
48	96	2688	576	1152	2688
56	112	3136	672	1344	3136
64	128	3584	768	1536	3584

## COMMUNICATIONS RECEIVED.

The Editor of the SCIENTIFIC AMERICAN acknowledges, with much pleasure, the receipt of original papers and contributions upon the following subjects:

On Screw Cutting Gears. By R. H. B.  
On the New Force. By H. M. P.  
On Solar Heat. By W. L. S.  
On the Contraction Policy. By F. A. L.  
On Revenues of Patents. By G. E. B.  
On the Hydro-Pneumatic Puzzle. By M. P., by C. M., and by N. B. J.  
On Spiritualism. By E. P. M., and by F. G. F.  
On the Orbit of the Sun. By J. S.  
On Making Rifles. By R.  
On Poisons. By H. S. W.  
On Carbonic Acid Gas. By C. W. S.  
On Oceanic Currents. By T. L.  
On Electric Whistles. By L. S. W.  
On Chemical Action. By E. V.  
On a Dioptric Light. By C. G., and by W. C. G.

Also inquiries and answers from the following:

I.—G. W. F., Jr.—T. B.—J. M.—A. J. B.—A. C.—G. E. C.—S. H.—S. H. H.—C. S. D.—S. E. H.—F. S. B.—A. R.—H. A.—J. G. S.—C. A. F.—C. L.—A. C. H.—J. A. W.—E. E. E.—R. B.—J. Q. R. B.

## HINTS TO CORRESPONDENTS.

Correspondents whose inquiries fail to appear should repeat them. If not then published, they may conclude that, for good reasons, the Editor declines them. The address of the writer should always be given.

Inquiries relating to patents, or to the patentability of inventions, assignments, etc., will not be published here. All such questions, when initials only are given, are thrown into the waste basket, as it would fill half of our paper to print them all; but we generally take pleasure in answering briefly by mail, if the writer's address is given.

Hundreds of inquiries analogous to the following are sent: "Who sells alligator leather? Who makes an engine run by burning crude oil in the cylinder? Who makes the best gas meter? Whose is the best process for preserving shingles? Who sells papier mache cornices and centerpieces for ceilings? Who makes reflecting drawing boards and other drawing apparatus? Who sells phosphor-bronze? Who sells haircloth for pressing cider?" All such personal inquiries are printed, as will be observed, in the column of "Business and Personal," which is specially set apart for that purpose, subject to the charge mentioned at the head of that column. Almost any desired information can in this way be expeditiously obtained.

## [OFFICIAL.]

## INDEX OF INVENTIONS

FOR WHICH

Letters Patent of the United States were

Granted in the Week Ending

November 16, 1875.

AND EACH BEARING THAT DATE.

(Those marked (r) are reissued patents.)

Alarm, door, spoor & Searle.....	170,400
Alarm etc., low water, T. Haas.....	170,361
Amalgamator, Bancroft & Walker.....	170,339
Asbes, stirring coal, J. Waldron.....	170,217
Auger handle, J. Swan.....	170,418
Bagasse, saturator for, A. W. J. Mason.....	170,156
Bale band stretcher, J. Z. Stocker.....	170,411
Barrel, Flye & Watson.....	170,163
Bed stone, oscillating, E. Armitage.....	170,326
Bedstead, sofa, W. B. Hamilton.....	170,308
Bedstead, sofa, J. Schoen.....	170,406
Bee hive, O. Colvin.....	170,237
Billet loop, K. W. Holmes.....	170,364
Billiard table, A. Hand.....	170,169
Binder, temporary, C. D. Lindsey.....	170,392
Binder, temporary, H. B. Stephenson.....	170,392
Boiler steam, R. Dempster.....	170,348
Boiler injector, W. Handall.....	170,399
Boiler superheater, T. Vernon.....	170,316
Bolts, etc., making, J. R. Blakelee.....	170,181
Boot, T. R. Evans.....	170,389
Boot tip, Merrill & Holt (r).....	6,783
Boot, wooden soled, M. J. S. Falcon.....	170,161
Boot burnisher, etc., A. C. & T. T. Esworthy.....	170,386
Box lid fastening, J. L. Stevens.....	170,410
Brush handles, forming, W. Wendell.....	170,380
Buffer stem, F. W. Pratt.....	170,190
Building block, B. A. Berryman.....	170,381
Burner, gas, A. M. Silber.....	170,407
Butcher's saw, W. Millsbaugh.....	170,161
Butter package, A. J. Dibble.....	170,343
Cable etc., electric, G. W. F. Hoogeveen.....	170,386
Camera obscura, T. A. Kellett.....	170,371
Car axle box, L. Brauer.....	170,388
Car brake, F. Klunzinger.....	170,377
Car brake shoe, H. Steak.....	170,409
Car coupling, Brinkerhoff, Bennett, & Selder.....	170,226
Car coupling, A. Brown.....	170,377
Car coupling, D. Harper.....	170,399
Car heater, safety, C. A. West.....	170,531
Car lifter, railroad, J. D. Imboden.....	170,574
Car platform, E. Tilt.....	170,419
Car seats, lock for, E. S. Scofield.....	170,198
Car starter, A. Dahler.....	170,347
Car starter, G. S. Knapp.....	170,178
Cars, wind wheel, A. W. Woodward.....	170,218
Cars, ventilating, E. E. Hargreaves.....	170,364
Carboy, A. H. Fatzinger.....	170,348
Carburetor, feed, etc., J. Austin.....	6,784
Card, playing, R. R. Landis.....	170,361
Carpet rag looper, W. H. H. Wyckoff.....	170,399
Carriage curtain, H. C. Moody.....	170,391
Carriage top, shifting, Gillespie & True.....	170,361
Caster, furniture, L. F. Cerr.....	170,156
Chair, reclining rocking, J. R. Newman.....	170,306
Chairs, bellows for rocking, E. E. Sells.....	170,308
Chandelier, F. S. Shirley.....	170,194
Cheese preserver, J. Q. Black.....	170,324
Chisel, submarine rock, A. J. Whitney.....	170,429
Chromometer, solar, M. Wheeler.....	170,420
Cigar mold, J. Charter (r).....	6,738
Clamp for stamp stems, tappet, N. J. Colman.....	170,380
Clock, geographical, S. J. Wallace.....	170,212
Clothes clamps, etc., slotting, M. Pratt.....	170,394
Clothes dryer, F. M. Clark.....	170,385
Clothes dryer, G. W. Green.....	170,385
Coffee huller, D. Lombard.....	170,388
Composition for beverage, W. A. Martin.....	170,394
Cooker, steam, G. H. Scribner.....	170,404
Cooking apparatus, H. M. Smith.....	170,199
Corn marker, J. McGregor.....	170,397
Corpses, head rest for, C. D. Blachford.....	170,231
Cow milker, W. H. Pearson.....	170,197
Cracker machine, C. S. Fowler.....	170,389
Cradle, W. V. & N. W. Van Dervort.....	170,416
Crane, R. B. Robison.....	170,301
Crosshead, J. W. Hill.....	170,379
Cultivator, Price & Hunt.....	170,398
Card cutter, A. & E. H. Sedgwick.....	170,404
Curry comb, C. E. L. Holmes.....	170,383
Curtain fixture, E. B. Lake.....	170,377
Curtain fixture, G. W. Petree.....	170,3



Detergent, J. W. Munger	170,188
Digger, potato, W. P. Martyn	170,187
Door pull, sliding, H. H. Elwell	170,187
Drill, coal shelling, P. G. Donohue	170,187
Drill, mining, J. S. Fleming	170,187
Dyeing fabrics, A. Schults	170,187
Earthenware, balled, B. F. Roberts	170,187
Elevator, B. T. Babbitt	170,187
Engine frame, steam, W. S. Finney	170,187
Engine, rotary, W. Haven	170,187
Engine bucket, rotary, B. T. Babbitt	170,187
Engines, valve box for, H. W. Adams	170,187
Envelope opener, La Blanc & St. Pierre	170,187
Equalizer, draft, H. Cartwright	170,187
Erasor, etc., protector, L. L. Tower (r)	6,796
Fabrics for skirts, etc., A. Komp	170,187
Fare register, Watson & Knowlton	170,187
Fence, J. D. & F. Hyberger	170,187
Fence, iron, E. Rogers	170,187
Fences putting bars on wire, W. Dulin	170,187
Filter and steel, testing, J. Garland	170,187
Filter and funnel, druggist's, A. E. Garrison	170,187
Fire escape, T. Jings	170,187
Fire escape, J. E. Lindlan	170,187
Fire kindler, C. F. Cusning	170,187
Fire lighter, G. Elberg	170,187
Fishing rod case, C. Perry	170,187
Flower stand, portable, D. M. Reynolds	170,187
Fruit jar, E. S. Hunt	170,187
Furnace door, puddling, J. Boyland	170,187
Furnace, hydrocarbon, H. M. Smith	170,187
Furnaces, feeding air to, W. C. Ford	170,187
Furnaces, superheating air for, W. C. Ford	170,187
Furnaces, retort for, H. M. Smith	170,187
Furnaces, heated air to, W. C. Ford	170,187
Furniture, castor, L. F. Corf	170,187
Game board, J. G. Thurber, Jr.	170,187
Gas conduits, naphthalene from, J. C. Tiffany	170,187
Gas lighter, electric, O. A. A. Bollins	170,187
Gas lighting, electric, E. E. Bean	170,187
Generator, steam, H. M. Smith	170,187
Glass, annealing, J. M. Brookfield	170,187
Glassware, making, T. B. Atterbury	170,187
Grain drill, J. C. Daman	170,187
Grate, J. Schreffel, Jr.	170,187
Halter fastening, J. Thornton	170,187
Hame, G. J. Letchworth	170,187
Hames, J. Thornton	170,187
Hame top, E. G. Latta	170,187
Harness tag, B. S. Leonard	170,187
Harvesters, J. O. Brown	170,187
Harvester, L. J. McCormick	170,187
Harvester, corn, Townsend and Parr	170,187
Harvester carriage attachment, J. O. Brown	170,187
Harvesting machine, J. O. Brown	170,187
Hay loader, Pett, and Manley	170,187
Heating drum, T. B. Field	170,187
Hinge, F. Toelt	170,187
Hoghead and barrel horse, J. N. Parker	170,187
Horse detacher, D. E. Owen	170,187
Horse power, G. W. C. Reed	170,187
Horse power, A. D. Manley	170,187
Horsehoes, A. Dunbar	170,187
Horsehoes-calking vise, W. Weaver	170,187
Hose coupling, W. A. Caswell	170,187
Hose, lining hydraulic, J. U. Braman	170,187
Hose pipe nozzle, S. Reid	170,187
Hydrant, J. O. Connor	170,187
Indicator, speed, M. A. Wier	170,187
Iron into steel, cast, C. L. Jeffords	170,187
Iron, refining cast, A. Warner	170,187
Jack, hydraulic, M. J. Walsh	170,187
Kiln, brick, H. W. Adams, Jr.	170,187
Kiln, brick, W. N. Weidner	170,187
Kitchen utensil, T. S. Page	170,187
Lamp chimneys, finishing, J. Lowery	170,187
Lamps, manufacture of, T. B. Atterbury	170,187
Lamps, wick raiser for, A. Albertson	170,187
Latch, locking, J. Drucklieb	170,187
Latch, reversal, H. S. Pomeroy	170,187
Leather, vat for tanning, O. W. Bean	170,187
Lighting rod, I. Johnson	170,187
Limb receiver, H. R. Allen	170,187
Loom shuttle, etc., J. Wolfenden	170,187
Loom web stop, Leherwood and Nuttall (r)	6,761
Lounges, attach frames to, W. Seng	170,187
Lubricators, C. H. Parshall	170,187
Macarons, preserve for, Heide and Wirtz	170,187
Mail bag fastening, H. M. Smith	170,187
Mattress, wire, A. L. Roda	170,187
Mattresses, frame for wire, W. J. Roda	170,187
Measure, graduated, Young and Davis	170,187
Meat mangic, C. C. Kerr	170,187
Mechanical movement, E. Leslie	170,187
Mill, I. A. Hedges	170,187
Mill and press, elder, B. Krumack	170,187
Mills, concentrating tailings from, F. E. Mills	170,187
Millstones, bearing for, C. Caster	170,187
Mitten, A. P. Smith (r)	6,764
Motion, converting, M. Crossman	170,187
Motor, volute spring, W. S. Shoemaker	170,187
Music sheet, electric, W. F. and H. Schmoel, Jr.	170,187
Needle threader, P. E. Lambert	170,187
Ore, classifying, E. M. Wenger	170,187
Paper collar, E. F. Bradford	170,187
Paper fastener, Pack and Vanhorn	170,187
Paper, perforating, W. Braidwood	170,187
Paper weight, E. Dressler	170,187
Parchment, vegetable, A. G. Fell	170,187
Pest cutter, Newton and Zollner	170,187
Photographic background, Taber and Boyd	170,187
Photometer, P. Mansinger	170,187
Picture frame, clamp, etc., C. P. Pomeroy	170,187
Pills, coating, A. F. W. and W. F. A. Neynaber	170,187
Pipe, blow, C. Humley	170,187
Pipe joint, J. Hyde	170,187
Pipe trap, waste, T. Hudson	170,187
Pipe, water, W. H. Sampson	170,187
Planing machine, hand, Doane and Passel	170,187
Planter, corn, J. B. Abbott	170,187
Planter, corn and seed, H. F. Sullivan	170,187
Planter, corn, G. W. Brown (r)	6,766, 6,766, 6,767
Plow, gang, F. A. Hill	170,187
Plows, furrow gage for, B. B. Hayes	170,187
Press, power, S. G. Martin	170,187
Printing press, J. L. Firm (r)	6,760
Prison doors, operating, B. Richter	170,187
Pump, etc., beer, D. S. Whitman	170,187
Pump bucket, chain, Van Duser et al.	170,187
Pump, rotary force, A. Carlin	170,187
Punch, conductor's alarm, H. H. & Ruger	170,187
Purifier, middlings, J. F. Gandolfo	170,187
Railroad rail chair, J. Gogerty	170,187
Railroad rail joint, B. Long	170,187
Register, T. B. Doobittle	170,187
Regis er, G. F. Spencer	170,187
Ruler, parallel, J. D. Hall	170,187
Saw, balance, H. Cutting	170,187
Saw, butcher's, W. Millspaugh	170,187
Scaffold, D. C. Place	170,187
Scales, weighing, W. W. Reynolds	170,187

Scoop, sifting, W. S. Boon	170,187
Screw-cutting machine, G. Emig	170,187
Screw tap, E. Reynolds	170,187
Sewing machine, W. C. Sharp	170,187
Separating substances, A. B. Stanberry	170,187
Separator, grain, W. W. Johnston	170,187
Sewing machine, F. Chase	170,187
Sewing machine, J. W. & R. H. Lufkin	170,187
Sewing machine, overstitch, W. A. Polmateer	170,187
Sewing machine table, H. R. Tracy	170,187
Sewing machine, A. Johnston	170,187
Ship's births, swinging, E. P. S. Andrews	170,187
Shirt front, W. J. & M. A. Duke	170,187
Shoe and stocking, rubber, J. M. Bibbins	170,187
Shutter fastener, S. C. Tuckerman	170,187
Shutter worker, A. House	170,187
Sizing composition, S. B. Dorian	170,187
Skate, E. Murray (r)	6,763
Slate-cleaning block, A. H. Bryant	170,187
Sofa and table, convertible, C. C. Harris	170,187
Solvents, etc., recovery of vaporized, Whiting et al.	170,187
Spike machine, W. Haddock	170,187
Spikes, machine for making split, A. Whittemore	170,187
Spinning, adjusting spindles, F. A. Sterry (r)	6,768
Spirits, P. Griffin	170,187
Stage plank and carrier, W. S. Booth	170,187
Steam whistle, King & McKiernan	170,187
Steel, manufacturing, F. Berchold	170,187
Stove, cooking, R. Thomas	170,187
Syringe, W. Molesworth	170,187
Table, extension, G. Heyl	170,187
Table, ironing, J. S. Hays	170,187
Tailor's coat measure, J. S. Charch	170,187
Telegraph, facsimile, J. C. Ludwig	170,187
Tenoning machine, E. H. Rees	170,187
Tide and current wheel, J. J. Hell	170,187
Tires, clip for broken, J. W. Hoddinott	170,187
Toilet case and towel roller, D. Miller	170,187
Trap, fly, H. B. Earing	170,187
Truss, H. A. Kimball	170,187
Tubes, bending metallic, J. M. Reid	170,187
Tuck marker, B. G. Buss	170,187
Twee, H. J. Chandler	170,187
Twee, P. H. Standish	170,187
Type-setting machine, J. Hooker	170,187
Type-writing machine, W. H. Case	170,187
Type-writing machine, L. S. Crandall	170,187
Valve seats, refitting, C. F. Hall	170,187
Ventilating churches, etc., W. Kingham	170,187
Vise, E. Caswell	170,187
Wagon body, C. A. Dewolf	170,187
Wagon brake, A. L. Bartlett	170,187
Washing machine, F. Gittere	170,187
Washing machine, J. D. Lawlor	170,187
Washing machine, J. I. Shotwell	170,187
Watch case spring, A. S. Bucklelew	170,187
Water ejector, H. Coil (r)	6,759
Water meters, register dial for, J. C. Kelley	170,187
Water wheel, S. C. Lyons	170,187
Well curb, C. M. Minor	170,187
Whistle, steam, King & McKiernan	170,187
Wind power, J. M. Armour	170,187
Windlass, friction, A. D. Stout	170,187
Window sash bead fastener, J. W. Tripp	170,187
Window shade roller, A. Roelofs	170,187
Wood-boring gage, G. S. Hudson	170,187
Wrench pipe, D. P. Stanton	170,187

## DESIGNS PATENTED.

6,750.—WATCH KEYS.—H. W. Sullock, Springfield, Mass.	
8,800.—BOXES.—J. H. England, Baltimore, Md.	
8,801.—SETTERS.—J. W. Pike, New York city.	
8,802.—SHOW CASE.—W. H. Grove, Philadelphia, Pa.	
8,803.—HAT HOLDER, ETC.—J. Hall, Newark, N. J.	
8,804.—LIFTSTANDS.—H. Lee, New York city.	
8,805 to 8,807.—FLOOR OIL CLOTS.—C. T. Meyer et al., Bergen, N. J.	
8,808.—PAPER WEIGHTS.—C. Rowland, New York city.	
8,809.—COFFIN HINGES.—J. W. Vaughn, Peabody, Mass.	
8,810.—OVERSHOES.—G. Watkinson, New Haven, Conn.	

## SCHEDULE OF PATENT FEE.

On each Case	\$10
On each Trade mark	\$25
On filing each application for a Patent (17 years)	\$15
On issuing each original Patent	\$24
On appeal to Examiners-in-Chief	\$10
On appeal to Commissioner of Patents	\$20
On application for Reissue	\$30
On filing a Disclaimer	\$10
On an application for Design (14 years)	\$10
On application for Design (7 years)	\$15
On application for Design (14 years)	\$20

## SCIENCE RECORD For 1876.



the following Departments:  
**CHEMISTRY AND METALLURGY.**  
**MECHANICS AND ENGINEERING.**  
**ELECTRICITY, LIGHT, HEAT, SOUND.**  
**TECHNOLOGY, THE USEFUL ARTS.**  
**BOTANY AND HORTICULTURE.**  
**AGRICULTURE.**  
**RURAL AND HOUSEHOLD ECONOMY.**  
**MATERIA MEDICA, THERAPEUTICS, HYGIENE.**  
**NATURAL HISTORY AND ZOOLOGY.**  
**METEOROLOGY, TERRESTRIAL PHYSICS.**  
**GEOGRAPHY.**  
**GEOLOGY AND MINERALOGY.**  
**ASTRONOMY.**  
**BIOGRAPHY AND NECROLOGY.**

Every person who desires to be well informed concerning the Progress of the Arts and Sciences should have a copy of **SCIENCE RECORD** for 1876. It will be a most interesting and valuable book, and should have a place in every Household and Library.

600 pages Octavo. Handsomely Bound. Many Engravings. Price \$2.50. Sent, post-paid, on receipt of price.

All the preceding volumes of **SCIENCE RECORD** may be had separately at \$2.50 each, or \$10 for the five volumes, 1872, 1873, 1874, 1875, and 1876.

MUNN & CO., PUBLISHERS,  
 37 Park Row,  
 New York city

## SCIENTIFIC AMERICAN

For 1876.

The Most Popular Scientific Paper in the World.

THIRTY-FIRST YEAR.

Only \$3.20 a year including Postage.

Send 10 cents for Specimen copy

THE SCIENTIFIC AMERICAN, now in its 31st year, enjoys the widest circulation of any weekly newspaper of the kind in the world. A new volume commences January 1, 1876. Published weekly. Now is the time to subscribe and to form clubs.

THE CONTENTS OF THE SCIENTIFIC AMERICAN embrace the latest and most interesting information pertaining to the Industrial, Mechanical, and Scientific progress of the world; Descriptions, with beautiful Engravings, of New Inventions, New Implements, New Processes, and Improved Industries of all kinds; Useful Notes, Recipes, Suggestions and Advice, by Practical Writers, for Workmen and Employers, in all the various arts.

EVERY NUMBER contains sixteen large quarto pages, elegantly printed and illustrated with many engravings. The year's issue contains 832 large pages, equal to four thousand book pages, at a cost, including postage, of only \$3.20 a year to the subscriber.

THE SCIENTIFIC AMERICAN will be especially enriched during the current year by splendid engravings and descriptions of the most noticeable objects in the great Centennial International Exhibition.

Engineers, Mechanics, Telegraphers, Inventors, Manufacturers, Chemists, Photographers, Physicians, Lawyers, Clergymen, Teachers, and People of all Professions, will find the SCIENTIFIC AMERICAN most useful and valuable. Its pages teem with interesting subjects for thought, study, and conversation, and are an unfailing source of new and instructive information. As an Instructor and Educator, the SCIENTIFIC AMERICAN has no equal. It is promotive of knowledge and progress in every community where it circulates. It should have a prominent place in every Household, Reading-Room, and Library.

Specimen copies sent, prepaid, on receipt of 10 cents.

## TERMS OF SUBSCRIPTIONS.—POSTAGE PAID BY US.

One copy Scientific American, one year	\$3.20
One copy Scientific American, six months	1.60
One copy Scientific American, three months	1.00
One copy Scientific American, and one copy Scientific American Supplement, both for one year, post-paid	7.00
One copy Scientific American, one year, and one copy Science Record	5.20

We make a liberal discount and give advantageous premiums to those who form Clubs or procure Subscriptions. A beautifully illustrated Subscription List, also Prospectus and Rates, sent free.

MUNN & CO.  
 37 PARK ROW, NEW YORK.



\$5 a year by mail, post-paid. Send 10 cents for Specimen Copy.

TO ILLUSTRATE AND DESCRIBE the many interesting themes and objects presented in the GREAT CENTENNIAL INTERNATIONAL EXPOSITION OF 1876, and also to meet the wants of that large class of readers who desire an increased supply of Scientific Information, particularly of the more Technical and Detailed character, we shall issue a SPECIAL PUBLICATION, entitled the SCIENTIFIC AMERICAN SUPPLEMENT, to be printed weekly during the Centennial year of 1876, and, perhaps, permanently thereafter. Each number will have sixteen large quarto pages, issued weekly, printed in the best style, uniform with the SCIENTIFIC AMERICAN, but separately pagged.

THE SCIENTIFIC AMERICAN SUPPLEMENT, in addition to the special matter pertaining to the International Exposition, will embrace a very wide range of contents, covering the most recent and valuable papers by eminent writers in ALL THE PRINCIPAL DEPARTMENTS OF SCIENCE AND USEFUL KNOWLEDGE, to wit:

- 1.—**Chemistry and Metallurgy.**—Embracing New Chemical Discoveries, Improvements, and Processes, with engravings. New Processes of Working Iron, Steel, Lead, Copper, Gold, Silver, and the Various Metals, with engravings of New Apparatus, New Information, etc.
- 2.—**Mechanics and Engineering.**—The latest and best papers upon Steam Engineering, Railway Engineering, Mining, and Civil Engineering, Mill Work, Textile Industry, with engravings and working drawings.
- 3.—**Electricity, Light, Heat, Sound.**—Latest Improvements in Telegraphy, Telephone Engineering; Improvements in Galvanic Batteries, Electric Engines, New and Useful Applications of Electricity in the Arts, with engravings.
- 4.—**Architecture.**—Examples of the best New Structures, with details and drawings.

## Munn &amp; Co.'s Patent Offices.

Established 1846.

The Oldest Agency for Soliciting Patents in the United States.

TWENTY-EIGHT YEARS EXPERIENCE.

**MORE PATENTS** have been secured through this agency, at home and abroad, than through any other in the world. They employ as their assistants a corps of the most experienced men as examiners, specification writers, and translators that can be found, many of whom have been selected from the ranks of the Patent Offices.

**SIXTY THOUSAND** inventors have availed themselves of Munn & Co.'s services in examining their inventions, and procuring their patents.

MUNN & CO., in connection with the publication of the SCIENTIFIC AMERICAN, continue to examine inventions confer with inventors, prepare drawings, specifications, and assignments, attend to filing applications in the Patent Office paying the government fees, and watch each case step by step while pending before the examiner. This is done through their branch office, corner F and 7th Streets, Washington. They also prepare and file caveats, procure design patents, trademarks, and releases, attend to rejected cases (prepared by the inventor or other attorneys), procure copyrights, attend to interferences give written opinions on matters of infringement, furnish copies of patents in fact, attend to every branch of patent business both in this and in foreign countries.

Patents obtained in Canada, England, France, Belgium, Germany, Russia, Prussia, Spain, Portugal, the British Colonies, and all other countries where patents are granted.

## Copies of Patents.

Persons desiring any patent issued from 1836 to November 26, 1867, can be supplied with official copies at a reasonable cost, the price depending upon the extent of drawings and length of specifications.

Any patent issued since November 27, 1867, at which time the Patent Office commenced printing the drawings and specifications, may be had by remitting to this office \$1.

A copy of the claims of any patent issued since 1836 will be furnished for \$1.

When ordering copies, please to remit for the same as above, and state name of patentee, title of invention, and date of patent.

A special notice is made in the SCIENTIFIC AMERICAN of all inventions patented through this Agency, with the name and residence of the patentee. Patents are often sold, in part or whole, to persons attracted to the invention by such notice.

A pamphlet of 110 pages, containing the laws and full directions for obtaining United States patents, also a circular pertaining exclusively to Foreign Patents, stating costs in each country, time granted, etc., sent free. Address

MUNN &amp; CO.,

PUBLISHERS SCIENTIFIC AMERICAN;

37 PARK ROW, N. Y.

BRANCH OFFICE—Corner F and 7th Streets, Washington, D. C.

**TERMS.**—Scientific American Supplement, One year, post-paid, \$5.00; half year, \$2.50; three months, \$1.25. Three copies, one year, \$12.50; five copies, \$20.00; ten copies, \$35.00. One copy of SCIENTIFIC AMERICAN and one copy of SCIENTIFIC AMERICAN SUPPLEMENT, one year post-paid, \$7.00.

Address MUNN &amp; CO., Publishers, 37 Park Row, New York.



# INDEX.

[illegible]







## Advertisements.

Back Page . . . . . \$1.00 a line.  
Inside Page . . . . . 75 cents a line.

Engraving may have advertisements at the same rate per line, by measurement, as the letter press. Advertisements must be received at publication office as early as Friday morning to appear in next issue.

**SPECIAL SALE OF CHUCKS**—One half dozen of each size of the Oneida Steam Engine Co.'s Universal and Independent, three and four jaw Chucks, Westcott's Patent. Address R. E. STATE, Springfield, O.

**LATHE WANTED**—48 in. Swing, 20 feet Bed. Second hand. Must be in good order. THOS. WORSWICK, Guelph, Ont.

**THE COPARTNERSHIP OF J. P. VERREE & Co.** being about to expire by limitation, that firm, now engaged in the manufacture of edge tools, hammers, &c., at Verree's Mills, Philadelphia, desiring to discontinue business, offer for sale the good-will, stock, and fixtures of said concern at a reasonable figure. The property can be leased for a term of years at a much reduced rate. Address J. P. VERREE & CO., Verree's Mills, P. O. Philadelphia, Pa.  
JOHN P. VERREE. W. G. JUSTICE.

**PUNCHING AND DROP PRESSES.** For the Best and Cheapest, address THE STILES & PARKER PRESS CO., MIDDLETOWN, CONN.

**With Danson's Saws.** Sold by Hardware Trade. LANGDON MITRE BOX CO., Millers Falls, Mass. Send for Circular.

**HOW TO WARM YOUR HOUSE.**—Read. The Gothic Furnace in my house gives entire satisfaction; it is very easily managed, the shaking apparatus being especially good. It furnishes plenty of heat, and allows no gas to escape. I consider myself fortunate in having selected your furnace, after much investigation and inquiry to replace one that had given me a great deal of trouble and annoyance, and I believe it is the best furnace in use. RYAN G. BRADLEY, 47 West Fifty-fifth Street, of the Board of Education. To ALEX. M. LEBLEY, 226 West Twenty-third Street. Send for catalogue, or call and see the furnace.

**For Sale,**  
The valuable Machine Works known as  
**The SOUTHWARK FOUNDRY,**  
Philadelphia,  
Owned and for sale by the late firm of  
**MERRICK & SONS.**

Lot 352336—four fronts.  
A railroad track, connecting with main line on Washington Avenue, runs through the works. All the buildings and tools are first class.  
The establishment can work to advantage from 600 to 800 men, and produce to the value of one and a quarter millions annually.  
Address, for full particulars, Room 2, 2d Floor, 320 South 3d St., Philadelphia, Pa.

**AMATEURS AND ARTIZANS.**  
THE FLEETWOOD SCROLL SAW, WITH Boring Attachment & Blower, is UNEQUALLED for Rapidity, Accuracy, Durability, and Low Cost.  
Saws Metal 1 in. thick and under; also Metals, Horn, Bone, Ivory, Shell, &c. It makes the most delicate Designs of Inlaid & Scroll Work. Price \$10 to \$15. Drill Attachment, \$5.50. Send for pamphlet and list of Designs of Fleet Work. Tappin Bros., Manufacturers, Wilmington, Del.

**WANTED**—A good Foundry Pattern Maker, also a good Moulder, one having a small capital to invest in trade preferred. Apply with stamp. T. B. BLAKE, Olatho, John Co., Kans.

**SMALL POX.**—Prevent its pitting. A sure, safe, and infallible remedy. Every house should keep it. Price \$1.00. Apply to J. ZACK TAYLOR, M.D., Deal's Island, Md.

**OK. DINNER PAIL, 30c.**—Best and most convenient Ever Sold. F. E. HEINIG, Louisville, Ky.

**FOR SALE**—One half interest in a Tobacco Patent. For particulars, address D. A. ALDEN, Malden, Mass.

**\$250** A MONTH—Agents wanted everywhere. Business honorable and first class. Particulars sent free. Address J. WORTH & CO., St. Louis, Mo.

**\$500 IN GOLD GIVEN AWAY.** also 50 per cent Commission. You can make from \$10 to \$30 daily. FAMILY JOURNAL CO., 232 Broadway, N. Y.

**CENTENNIAL DRILL CHUCK.**—Warranted perfect and durable. Holds 1-64 to 1-32 in. Sent by mail on receipt of price, \$1.25. Sent for new reduced list of Chucks. A. F. CUSHMAN, Hartford, Conn.

**Machinery of Improved Styles for making SHINGLES, HEADING AND STAVES.** Sole makers of the well known Improved Law's Patent SHINGLE and HEADING SAWING MACHINE. For circulars, address TREVOR & CO., Lockport, N. Y.

**WROUGHT IRON BEAMS & GIRDERS**


**THE UNION IRON MILLS, Pittsburgh, Pa.**  
The attention of Engineers and Architects is called to our improved Wrought-Iron Beams and Girders (patented), in which the compound welds between the stem and flanges, which have proved so objectionable in the old mode of manufacturing, are entirely avoided. We are prepared to furnish all sizes at terms as favorable as can be obtained elsewhere. For descriptive lithograph, address Carnegie Brothers & Co., Union Iron Mills, Pittsburgh, Pa.

**The HOADLEY PORTABLE STEAM ENGINE**  
WITH  
WATER-TIGHT CUT-OFF REGULATOR  
AND  
DRAWN WATER  
PUMP  
THE BEST & MOST ECONOMICAL ENGINE  
SEND FOR CIRCULAR  
THE J. C. HOADLEY CO. LAWRENCE, MASS.

## CLARK &amp; COMPANY'S PATENT SELF-COILING, REVOLVING STEEL SHUTTERS

Can be readily fitted to Store Fronts, Rear Windows or other openings, making them FIRE AND BURGLAR PROOF, and affording absolute protection; also, **WOOD SHUTTERS** in various kinds of wood, suitable for Store Fronts, Private Houses, Offices, and School Partitions. Clark's shutters are self-acting, require no machinery or balance weights, and cannot get out of order. They are handsome in appearance, and are the best and cheapest shutters in the world. Are fitted to the new Tribune Building, Delaware and Hudson Canal Building, Manhattan Building, Lenox Library Building. Have been for years in daily use in every principal city throughout Europe, and are endorsed by the leading architects of the world.  
JAMES G. WILSON, Manager, 215 West 36th St., New York, and at London, Paris, Vienna, Berlin, Melbourne, &c., &c.

## AGENTS WANTED.



**THE Bigelow Engine,**  
The Cheapest and Best Portable Engine offered to the Public.  
Price, 4 Horse Power.....\$300  
" 6 " " ".....350  
" 8 " " " ".....400  
" 10 " " " ".....450  
" 12 " " " ".....500  
" 15 " " " ".....550  
Price of Stationary Engines:  
4 Horse Power.....\$150  
6 " " " ".....175  
8 " " " " ".....200  
10 " " " " ".....225  
12 " " " " ".....250  
15 " " " " ".....275  
Send for Illustrated Circular and Price List.  
H. B. BIGELOW & CO., New Haven, Conn.

\$5 to \$20 per day at home. Samples worth \$1 free. STRYKER & CO., Portland, Maine.

**The TOLL-GATE** Prize Picture sent free! An ingenious gem! \$5 objects to find! Address with stamp, E. C. ASSEY, Buffalo, N. Y.

**Brainard Milling Machines** all styles. A new Universal Milling Machine for \$300. Also Brown's Pat. SCREW MACHINES, and new Brainard STEEL BAR VISE. B. M. M. CO., 131 Milk St., Boston, Mass.

**OPIMUM** and Morphine habit absolutely and speedily cured. Painless; no publicity. Send stamp for particulars. Dr. Carlsten, 127 Washington St., Chicago, Ill.

**Hammond's Window Springs.** for all windows. Six Samples mailed for 50 cents. W. S. HAMMOND, Lewisberry, York Co., Pa.

**Barnes' Foot-power Scroll Saws and Lathes.** An entire revolution in the construction of foot-power machines! The old style thrown aside when these are known! Thousands now in use! \$1.50 to \$2.00 per year made using them. One person out of every three who send for catalogues of these machines buys one. Say what paper you read this in, and address W. F. & J. BARNES, Rockford, Winnebago Co., Ill. Box 5044.

**FINE MACHINISTS & AMATEUR TOOLS.** Foot Lathes, Polishing Lathes, Centennial Grind Stones, Taps, Dies, Drills, Automatic Boring Tool, Fleetwood Scroll Saws. Send 6 cents in Stamp for Complete Illustrated Catalogue. JACKSON & TYLER, 16 German Street, Baltimore, Md.

**PATENT DOUBLE ECCENTRIC CORNICE BRAKE.** Manufactured by THOMAS & ROBINSON, Cincinnati, O. Send for Circulars.

**PATENT Planing and Matching** and Molding Machines, Gray and Wood's Planers, Self-acting Saw Arbors, and other wood-working machinery. S. A. WOOD'S MACHINE CO., 91 Liberty St., N. Y. Send for Circulars, etc. 15 Sudbury St., Boston.

**PATENT COLD ROLLED SHAFTING.**  
The fact that this shafting has 75 per cent greater strength, a finer finish, and is truer to gauge than any other in use renders it undoubtedly the most economical. We are also the sole manufacturers of the CALKINS and COLLINGS' PAT. COUPLING, and furnish Pulley Langers, &c., of the most approved styles. Price list mailed on application to JONES & LAUGHLINS, 190 S. Canal Street, Chicago, Ill.

Stocks of this shafting in store and for sale by FULLER, DANA & FITZ, Boston, Mass. GEO. PLACK & CO., 131 Chambers St., N. Y. PIERCE & WHALING, Milwaukee, Wis.

**OTIS' SAFETY HOISTING Machinery.** OTIS, BROS. & CO., No. 345 BROADWAY, NEW YORK.

**PILES.** A Sure Cure. Trial box only 25c. A. F. W. PALMIST, 35 E. 7th St., N. Y.

**Machinists' Tools.** All sizes at low prices. E. GOULD, Newark, N. J.

**WITHERBY, RUGG & RICHARDSON,** Manufacturers of Woodworth Planing, Tongueing, and Grooving Machines, Daniel's Planers, Richardson Patent Improved Tenon Machines, Mortising, Milling, and Re-Saw Machines, and Wood-Working Machinery generally, 26 Salisbury Street, Worcester, Mass. (Shop formerly occupied by E. BALL & CO.) L. B. WITHERBY, E. J. RUGG, E. M. RICHARDSON.

**10 DECALCOMANIE,** or TRANSFER PICTURES, with book of 24 pp., giving full instructions in this new and beautiful art, sent post-paid for 10 cts. Birds, Insects, Flowers, Autumn Leaves, Comic Figures, &c. They can be easily transferred to any article as to imitate the most beautiful painting. Also, a beautiful GEM CHROMOS for 15 cts.; 50 for 50 cts. Agents wanted. Address J. L. PATTEN & CO., 148 William Street, New York.

**NEW & SECOND HAND WOOD WORKING Machinery.** Floorers, Planers and Matchers, Single and Double Surfacters, Moulding Machines, Scroll Saws, Bucking and Bias Fans for Shavings, &c. D. J. LATTIMORE, 81st and Chestnut Sts., Philadelphia, Pa.

**J. M. CARPENTER** MANUFACTURER OF FIRST CLASS TAPS, Pawtucket, R. I.

**FINE TOOLS** For Machinists, Jewelers, Engravers, Watchmakers, Amateurs, and others. Also, a fine assortment of File and Steel Wire Supplies, at FRASSE & CO.'S, 83 Chatham Street, New York.

**IMPORTANT FOR ALL CORPORATIONS AND MANUFACTURERS.**—Buerk's Watchman's Time Detector, capable of accurately controlling the motion of a watchman or patrolman at the different stations of his beat. Send for circular.

J. E. BUERK, P. O. Box 978, Boston, Mass. N. B.—The said Agent, Embury & Co., of New York, was decided in my favor, June 10, 1874. Proceedings have been commenced against Embury & Co. for selling, contrary to the order of the Court, and especially the clock with a series of springs in the cover, and marked Feb'y 10, 1874. Persons using these, or any other clocks infringing on my Patent, will be dealt with according to law.

## RACING BOAT STOCK. SPANISH &amp; WHITE CEDAR.

Extra lengths and quality, from 8-16th thick up, planed and unplanned. Also, full stock of HARD-WOOD LUMBER and VENEERS, MAHOGANY, SATINWOOD, ROSEWOOD, WALNUT, &c.  
Inclose Stamp for Catalogue and Price-List.

**Geo. W. Read & Co.,**  
156 to 200 Lewis St., 5th & 6th Sts., N. Y.

WASHINGTON, D. C., Sept. 18, 1875.  
JNO. MAYHEW, Treas. Valley Machine Co., East Hampton, Mass.  
Dear Sir: The "Wright Bucket Plunger Steam Pump" you built for the Government "works like a top." Am sure it has never had its equal in any of the Departments, and I have no hesitancy in recommending this Pump to any one in want of a first class, noiseless Steam Pump. Very respectfully,  
J. THOS. MILLER, Chief Engineer U. S. House of Representatives.  
Send to us for Catalogue. V. M. COMPANY.

**The Myers Portable Engine,** 4, 6, 8, 10, 12, 15, 20, 25, 30, 40, 50, 60, 75, 100, 125, 150, 200, 250, 300, 400, 500, 600, 750, 1000, 1250, 1500, 2000, 2500, 3000, 4000, 5000, 6000, 7500, 10000, 12500, 15000, 20000, 25000, 30000, 40000, 50000, 60000, 75000, 100000, 125000, 150000, 200000, 250000, 300000, 400000, 500000, 600000, 750000, 1000000, 1250000, 1500000, 2000000, 2500000, 3000000, 4000000, 5000000, 6000000, 7500000, 10000000, 12500000, 15000000, 20000000, 25000000, 30000000, 40000000, 50000000, 60000000, 75000000, 100000000, 125000000, 150000000, 200000000, 250000000, 300000000, 400000000, 500000000, 600000000, 750000000, 1000000000, 1250000000, 1500000000, 2000000000, 2500000000, 3000000000, 4000000000, 5000000000, 6000000000, 7500000000, 10000000000, 12500000000, 15000000000, 20000000000, 25000000000, 30000000000, 40000000000, 50000000000, 60000000000, 75000000000, 100000000000, 125000000000, 150000000000, 200000000000, 250000000000, 300000000000, 400000000000, 500000000000, 600000000000, 750000000000, 1000000000000, 1250000000000, 1500000000000, 2000000000000, 2500000000000, 3000000000000, 4000000000000, 5000000000000, 6000000000000, 7500000000000, 10000000000000, 12500000000000, 15000000000000, 20000000000000, 25000000000000, 30000000000000, 40000000000000, 50000000000000, 60000000000000, 75000000000000, 100000000000000, 125000000000000, 150000000000000, 200000000000000, 250000000000000, 300000000000000, 400000000000000, 500000000000000, 600000000000000, 750000000000000, 1000000000000000, 1250000000000000, 1500000000000000, 2000000000000000, 2500000000000000, 3000000000000000, 4000000000000000, 5000000000000000, 6000000000000000, 7500000000000000, 10000000000000000, 12500000000000000, 15000000000000000, 20000000000000000, 25000000000000000, 30000000000000000, 40000000000000000, 50000000000000000, 60000000000000000, 75000000000000000, 100000000000000000, 125000000000000000, 150000000000000000, 200000000000000000, 250000000000000000, 300000000000000000, 400000000000000000, 500000000000000000, 600000000000000000, 750000000000000000, 1000000000000000000, 1250000000000000000, 1500000000000000000, 2000000000000000000, 2500000000000000000, 3000000000000000000, 4000000000000000000, 5000000000000000000, 6000000000000000000, 7500000000000000000, 10000000000000000000, 12500000000000000000, 15000000000000000000, 20000000000000000000, 25000000000000000000, 30000000000000000000, 40000000000000000000, 50000000000000000000, 60000000000000000000, 75000000000000000000, 100000000000000000000, 125000000000000000000, 150000000000000000000, 200000000000000000000, 250000000000000000000, 300000000000000000000, 400000000000000000000, 500000000000000000000, 600000000000000000000, 750000000000000000000, 1000000000000000000000, 1250000000000000000000, 1500000000000000000000, 2000000000000000000000, 2500000000000000000000, 3000000000000000000000, 4000000000000000000000, 5000000000000000000000, 6000000000000000000000, 7500000000000000000000, 10000000000000000000000, 12500000000000000000000, 15000000000000000000000, 20000000000000000000000, 25000000000000000000000, 30000000000000000000000, 40000000000000000000000, 50000000000000000000000, 60000000000000000000000, 75000000000000000000000, 100000000000000000000000, 125000000000000000000000, 150000000000000000000000, 200000000000000000000000, 250000000000000000000000, 300000000000000000000000, 400000000000000000000000, 500000000000000000000000, 600000000000000000000000, 750000000000000000000000, 1000000000000000000000000, 1250000000000000000000000, 1500000000000000000000000, 2000000000000000000000000, 2500000000000000000000000, 3000000000000000000000000, 4000000000000000000000000, 5000000000000000000000000, 6000000000000000000000000, 7500000000000000000000000, 10000000000000000000000000, 12500000000000000000000000, 15000000000000000000000000, 20000000000000000000000000, 25000000000000000000000000, 30000000000000000000000000, 40000000000000000000000000, 50000000000000000000000000, 60000000000000000000000000, 75000000000000000000000000, 100000000000000000000000000, 125000000000000000000000000, 150000000000000000000000000, 200000000000000000000000000, 250000000000000000000000000, 300000000000000000000000000, 400000000000000000000000000, 500000000000000000000000000, 600000000000000000000000000, 750000000000000000000000000, 1000000000000000000000000000, 1250000000000000000000000000, 1500000000000000000000000000, 2000000000000000000000000000, 2500000000000000000000000000, 3000000000000000000000000000, 4000000000000000000000000000, 5000000000000000000000000000, 6000000000000000000000000000, 7500000000000000000000000000, 10000000000000000000000000000, 12500000000000000000000000000, 15000000000000000000000000000, 20000000000000000000000000000, 25000000000000000000000000000, 30000000000000000000000000000, 40000000000000000000000000000, 50000000000000000000000000000, 60000000000000000000000000000, 75000000000000000000000000000, 100000000000000000000000000000, 125000000000000000000000000000, 150000000000000000000000000000, 200000000000000000000000000000, 250000000000000000000000000000, 300000000000000000000000000000, 400000000000000000000000000000, 500000000000000000000000000000, 600000000000000000000000000000, 750000000000000000000000000000, 1000000000000000000000000000000, 1250000000000000000000000000000, 1500000000000000000000000000000, 2000000000000000000000000000000, 2500000000000000000000000000000, 3000000000000000000000000000000, 4000000000000000000000000000000, 5000000000000000000000000000000, 6000000000000000000000000000000, 7500000000000000000000000000000, 10000000000000000000000000000000, 12500000000000000000000000000000, 15000000000000000000000000000000, 20000000000000000000000000000000, 25000000000000000000000000000000, 30000000000000000000000000000000, 40000000000000000000000000000000, 50000000000000000000000000000000, 60000000000000000000000000000000, 75000000000000000000000000000000, 100000000000000000000000000000000, 125000000000000000000000000000000, 150000000000000000000000000000000, 200000000000000000000000000000000, 250000000000000000000000000000000, 300000000000000000000000000000000, 400000000000000000000000000000000, 500000000000000000000000000000000, 600000000000000000000000000000000, 750000000000000000000000000000000, 1000000000000000000000000000000000, 1250000000000000000000000000000000, 1500000000000000000000000000000000, 2000000000000000000000000000000000, 2500000000000000000000000000000000, 3000000000000000000000000000000000, 4000000000000000000000000000000000, 5000000000000000000000000000000000, 6000000000000000000000000000000000, 7500000000000000000000000000000000, 10000000000000000000000000000000000, 12500000000000000000000000000000000, 15000000000000000000000000000000000, 20000000000000000000000000000000000, 25000000000000



## Advertisements.

Back Page ..... \$1.00 a line.  
Inside Page ..... 75 cents a line.  
Engravings may head advertisements at the same rate  
per line, by measurement, as the letter press. Ad-  
vertisements must be received at publication office as  
early as Friday morning to appear in next issue.

Engine, Spindle, & Cylinder Oil. E. H. KELLONE,  
11 Cedar St., N. Y. Manufactures the best. Established '68.

## C. G. Gunther's Sons

INVITE ATTENTION TO THEIR FINE  
STOCK OF

**FUR-LINED  
SILK CIRCULARS,**  
OF DIFFERENT STYLES, PLAIN AND  
TRIMMED, AND MADE UP WITH  
SPECIAL CARE.

AN ADDITIONAL ASSORTMENT OF CHOICE  
**Seal-Skin Sacques**  
OFFERED FOR THE:

## Holidays.

502 & 504 Broadway.


### THE Manufacturer and Builder.

The best and cheapest mechanical and scientific jour-  
nals in the world. Edited by Prof. F. H. Vander Weide.  
Each number contains treasures of information on all  
practical and scientific subjects. Subscription price \$2.00  
per year. Postage one cent a month extra. Ten thou-  
sand (10,000) applications wanted for specimen copies,  
which will be furnished free. Liberal commissions to  
agents. Address **AUSTIN BLACK, Pub'r,**  
21 Park Row, New York.  
P. O. Box 426.



Illustrated catalogue free.  
**A. J. BICKNELL & CO.,** 71 Warren St., N. Y.

### EAGLE FOOT LATHES.



With Scroll and Circular Saw Attach-  
ments, Slide Rest, Tools, &c.; also small  
Engine Lathes, Metal Hand Planers, &c.  
Neatest designs, superior finish. Low  
Prices. Our new Catalogue describes  
these and every tool necessary for the  
carver or artisan. Send for it.  
**WM. L. CHASE & CO.,**  
38 & 41 Liberty St., New York.

### Planing & Matching.

Moulding, Re-sawing and Tenoning Machines. Scroll  
Saws and General Wood-Working Machinery.  
**JOHN B. SCHENCK'S SONS,** Mattawan, N. Y.  
Send for Catalogue. 118 Liberty St., N. Y. City.

**RS** The RAILROAD GAZETTE, weekly, has illus-  
trations and descriptions of everything of novelty  
and merit in railroad construction and operation.  
Contains all the railroad news. Read and highly com-  
mended by eminent railroad men, many of whom write  
for it. Specimens free. \$4.20 a year. Subscribers for  
1876 will receive numbers in 1875 from the time they sub-  
scribe. Address 75 Broadway, New York.

## ELGIN WATCHES.



**DECLARED** by Railroad Officers, Engineers, As-  
tronomers, Explorers, Navigators,  
Travelers and others, to be the **Most Accurate**,  
Durable timekeepers in the world.

**25 GRADES** Ladies and Gentlemen's  
sleeve Key Winder, Stem Winder, Stem Setters,  
Full Plate, Three-Quarter Plate, Plain, Full Jeweled,  
Etc.

**PRICES** ranging from a few dollars for plain  
but neat, Durable and Reliable  
timekeepers in Silver cases, to two hundred or more  
dollars for a highly finished and remarkably accu-  
rate one in fine Gold case.

**AVOID** all C. O. D. advertisements and apply to dealers  
of known respectability, as Elgin Watches  
are not furnished to any party whatever to be  
sold on the disreputable C. O. D. plan, which is used  
to palm off imitation and cheap goods.

**DEMAND** and receive with your watch the regu-  
lar warranty merited of the Company,  
as noted below, and see that the name and number  
correspond.

**THE WATCH** named T. M. Avery is offered at  
such prices as to come within  
the reach of all, and is unequalled in the world for  
the money.

**GUARANTEE** The Company makes no watches  
at any price, low or high, which it  
is not willing to FULLY WARRANT. Each watch  
guaranteed of any and every grade, made by the Elgin National  
Watch Company, and bearing its trade-mark "El-  
gin, Ill." is accompanied by the official WARRANT  
MEDAL of the Company, with number and name cor-  
responding to the watch.

**FOR-SALE** by respectable jewelers in nearly  
every town in the United States and  
Canada, and also in the principal cities throughout  
the world. Call on your jeweler and ask to see them.



ESTABLISHED 1843.

GENERAL AGENTS.—New York: J. Clark Wilson & Co.; Russell & Erwin Mfg Co.; H. Durrie & Co.  
PHILADELPHIA: James C. Hand & Co. BOSTON: George H. Gray & Danforth. BALTIMORE: W. H. Coie. CHICAGO: Post & Co. CINCINNATI: S. Kimbark. LOUISVILLE: W. B. Belknap & Co.

**Pyrometers.** For showing Heat of  
Boiler fires, Super-Heated Steam, Oil Stills, &c.  
**HENRY W. BULKLEY,** Sole Manufacturer,  
14 Liberty St., New York.

**ROGERS' TANNATE OF SODA BOILER  
SCALE PREVENTIVE.** JOSEPH G. ROGERS & CO.,  
Madison, Ind.  
Send for book on Boiler Incrustation.

**DAMPER BEST AND LEVER  
REGULATORS GAGE COCKS.**  
**MURRILL & KEIZER,** 44 Holliday St., Balt.

**THE NATIONAL  
Steel Tube Cleaner.**

For Cleaning  
Boiler Tubes.  
Adopted and in use by U. S. Navy. For sale by dealers.  
Send for Circular. **THE CHALMERS SPENCE CO.,**  
Foot E. 9th Street, N. Y. Agents for the U. S.

**NON-COMBUSTIBLE STEAM BOILER & PIPE  
COVERING**

WITH "AIR SPACE" IMPROVEMENT.  
Saves 10 to 20 per cent. **CHALMERS SPENCE CO.,**  
Foot E. 9th St., N. Y.; 1222 N. 2nd St., St. Louis, Mo.

**PORTLAND CEMENT**

For Walls, Cisterns, Foundations, Stables, Cellars,  
Bridges, Reservoirs, Breweries, &c.  
Remits cents postage for Practical Treatise on Cements.  
**S. L. MERRICK & CO.,** 78 South St., New York.

**IRON PLANERS.**  
ENGINE LATHES, DRILLS, &c. Send for Price List.  
**NEW HAVEN MANUFACTURING CO.,**  
New Haven, Conn.

**THE SOUTHERN STATES  
AGRICULTURAL AND INDUSTRIAL  
EXPOSITION**

Will be held on the Fair Grounds, at  
New Orleans, Commencing February  
26, 1876, and Continuing Ten Days.

**L. N. MARKS, PRESIDENT.**  
**SAMUEL MULLEN, GENERAL SUPERINTENDENT.**  
**Executive Committee.**

**JAMES I. DAY, Chairman.** **W. B. SCHMIDT,**  
**COLONEL J. D. HILL.** **JOHN G. FLEMING.**

It is the aim of the Board of Commissioners to make it  
a thorough Exposition of the Agricultural and Mechan-  
ical Products of the Southern States, Mexico, and Central  
America; but it will be open to competitors throughout  
the country, and the general premium list will embrace  
all articles comprehended in the general design of an  
Agricultural and Industrial Exposition, including special  
premiums for strictly Southern products.

The Mechanical Department has been devised with  
great care and on the most extensive scale. The Pre-  
mium List will be ready for distribution November 30th.  
Ample arrangements have been perfected for the trans-  
portation of goods and visitors from every section at re-  
duced rates. For detailed information, address  
**SAMUEL MULLEN, Gen'l Sup't.**  
No. 20 Camp St., New Orleans.

**THE TANTIE COMPANY**

Emery Wheels, Emery Grinders  
**STROUDSBURG MONROE CO. PA.**

**PURE EMERY.**  
guaranteed equal to any in the market at prices lower  
than any other first class emery.

**W. C. DUYCKINCK,**  
IMPORTER, MANUFACTURER AND DEALER IN  
Railway, Machinists' and En-  
gineers' Supplies,  
50 AND 52 JOHN STREET,  
P. O. Box 4101. NEW YORK.

**CONCORD AXLES**

The Standard—Best Stock—Finest Finish.  
MANUFACTURED ONLY BY  
**D. ARTHUR BROWN & CO., Fishersville, N. H.**

**DICKINSON'S  
ADJUSTABLE DIAMOND TOOL.**

and Shaped Diamond Carbon Points, indispensable for  
Turning Emery Wheels, Grindstones, also Truing up  
Hardened Steel and Paper Calendar Rollers, etc. Address  
**J. DICKINSON, Patentee,** 64 Nassau St., N. Y.

**NO FILES ARE USED ON HOE'S CHISEL  
TOOTH SAWS.** No sawing, no gumming, no  
rounding, nor side set to perplex the sawyer. They run  
straight, and are fifty per cent cheaper to use than the  
old saw.

**REYNOLDS & CO.,**  
145 EAST ST., NEW HAVEN, CT.,  
MANUFACTURE

Iron and Steel Set Screws, Round, Square, and Hexagon  
Head; Machine and Cap Screws; Piano, Knob, and Lock  
Screws; Machine, Bridge, and Roof Bolts; Bolt Ends,  
Blanks, Nuts, Washers, &c., of every description.  
Send for Price List.

**RICHARDSON, MERIAM & CO.,**  
Manufacturers of the latest improved Patent Daniels'  
and Woodworth Planing Machines, Matching, Sash and  
Moulding, Tenoning, Morrelling, Boring, Shaping, Veri-  
cal and Circular Re-sawing Machines, Saw Mills, Saw  
Arbors, Scroll Saws, Railway, Cut-Off, and Rip-saw  
Machines, Spoke and Wood Turning Lathes, and various  
other kinds of Wood-working Machinery. Catalogues and  
price lists sent on application. Manufacturing, Wor-  
cester, Mass. Warehouse, 101 Liberty Street New York.

## The Eagle Anvil,

WARRANTED and  
Price Reduced to 10 Cts. per Pound.

JERRON'S BEST TOOL CAST STEEL FACE AND HORN ON BEST  
AMERICAN IRON.

They have proved better than the Best English  
Anvils.

GENERAL AGENTS.—New York: J. Clark Wilson & Co.; Russell & Erwin Mfg Co.; H. Durrie & Co.  
PHILADELPHIA: James C. Hand & Co. BOSTON: George H. Gray & Danforth. BALTIMORE: W. H. Coie. CHICAGO: Post & Co. CINCINNATI: S. Kimbark. LOUISVILLE: W. B. Belknap & Co.

### Schlenker's Stationary

Revolving - Die Bolt Cutters,  
MANUFACTURED BY THE  
**HOWARD IRON WORKS,**  
BUFFALO, N. Y.

Send for Circular.

**HARTFORD**

**STEAM BOILER**

Inspection & Insurance  
COMPANY.

**W. B. FRANKLIN, V. Pres't.** **J. M. ALLEN, Pres't.**  
**I. B. PIERCE, Sec'y.**

HARTFORD, CONN.

**TO ENGINEERS, MACHINERY MANU-  
FACTURERS, AND TOOL MAKERS.** The undersigned  
DUTCH Firm is willing to undertake the sole Agency in  
Holland of SUPERIOR CLASS OF ENGINES, AGRICUL-  
TURAL MACHINERY, AND ENGINEERING  
TOOLS. None but FIRST CLASS MANUFACTURERS need  
apply.  
**LEONARD SLIGCHER,**  
Monnickendam, Holland.

FOR THE HOLIDAYS—Gas Fitter's & Plum-  
ber's Guide, a book of instruction. A Valuable  
Present for man or boy. Illustrated.  
Paper cover, 75c.; nicely bound, \$1. by mail  
free. **J. D. GALLOWAY,** 345 N. 10th, Phila.

**TO DYERS AND MANUFACTURERS.**  
Thomas's Fluid Tannic Acid, or Black Color Base,  
for Coloring Hats, Carpets, and all Felt Goods, and Tex-  
tile Fabrics, and for making Ink. Price 50c. per lb. Ad-  
dress **N. SPENCER THOMAS, Kimira, N. Y.**

**NOYE'S  
Mill Furnishing Works**

are the largest in the United States. They make Burr  
Millstones, Portable Mills, Small Machines, Packers, Mill  
Picks, Water Wheels, Pulleys and Gearing, specially  
adapted to flour mills. Send for catalogue.  
**J. T. NOYE & SON, Buffalo, N. Y.**

**MICROSCOPES.**  
First class Microscopes, magnifying 100 diameters.  
Price \$2.00. Smaller size, with same focal adjustment,  
\$1.50. Address **F. BLOCKLEY,** 233 Van Buren Street,  
Brooklyn, New York. Illustrated Circulars sent free.

**LIFE-LIKE PICTURES,** accurate as photographs,  
can be drawn on paper by means of Parlor Camera.  
Price \$1.25, prepaid. Send for Circular to  
**F. BLOCKLEY,** 233 Van Buren Street, Brooklyn, N. Y.

**WIRE ROPE**

Address **JOHN A. MOEBLING & SONS, Manufacturer,**  
Trenton, N. J., or 111 Liberty St., New York.  
Wheels and Ropes for conveying power long distances.  
Send for Circular.

**PATENT RIGHT FOR SALE.**—The one-half  
interest of the Riley estate in the Universal Wood  
Worker, to the highest bidder. Send offer to  
**J. B. MANNIX, Adm'r,** 145 Walnut St., Cincinnati, O.

**ENGINES & BOILERS** new & 2nd h'd. perfect condition.  
Every cheap. Address **BINGHAM & RICH,** Oil City, Pa.

**Portland Cement.**  
From the best London Manufacturers. For sale by  
**JAMES BRAND,** 35 CHURCH ST., N. Y.  
A Practical Treatise on Cement furnished for 25 cents.

**THE BEST INJECTOR**  
For Locomotive and Stationary Boilers.  
**FRIEDMAN'S PATENT.**

Over 15,000 Now in Use Here and in Europe.  
Throws more and hotter water, with less steam, than  
any others. It has two Waterways, fixed Nozzles, and no  
movable parts to get out of order.  
**NATHAN & DREYFUS, Sole Manufacturers,**  
100 Liberty St., New York.  
Send for Catalogue.

**Non-Freezing, Filtering, Automatic  
STEAM  
TRAP.**

Sent C. O. D. to  
any part of the  
country, and War-  
ranted to work per-  
fect, or the money refunded. No. 0 drains 2,000 ft., 1 in.  
pipe, \$30 No. 1, 4,000, \$40. No. 2, 20,000, \$50, largest  
Size, 9x14x15 in. Send for Circular.

**WM. H. JENKINS & CO.,**  
228 Church Street, Philadelphia, Pa.


**CANCER** Successfully  
Treated,  
without use of Knife or Caustic.  
For A. H. Brown, New Haven,  
Conn. Send two postage stamps.  
Correspondence from Physicians solicited.

**\$12 a day at home.** Agents wanted. Outfit and  
terms free. **TRUE & CO., Augusta, Maine.**

**\$77 A WEEK** to Agents, Old & Young, Male & Fe-  
male, in their locality. Terms & OUTFIT FREE.  
Address **F. O. VICKERY & CO., Augusta, Me.**

**THOMAS'S FLUID TANNATE OF SODA.**  
Never fails to remove Scale from any Steam Boiler,  
using any kind of water. It is in Barrels 500 lb., 4 Bbls.  
250 lb., 1 Bbl. Price only 10c. per lb. Address  
**N. SPENCER THOMAS, Kimira, N. Y.**

**MAGNETS—Permanent Steel Magnets**  
of any form or size, made to order by **F. C. BEACH  
& CO.,** 34 Canal St., New York. Makers of the cele-  
brated Tom Thoms and Miniature Telegraph Instru-  
ments.

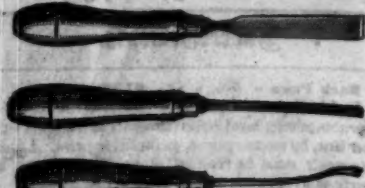

We will send this set of CARVING TOOLS in a box by  
mail, prepaid, on receipt of one dollar. The tools are of  
the very best quality, with Apple Wood handles, and  
nicely sharpened for use. **MILLERS FALLS CO.,**  
78 Beekman St., New York.

**T. V. Carpenter, Advertising Agent.** Address  
Box 772, New York City.

**WESTON'S  
Differential Pulley  
BLOCKS,**

ALSO KNOWN AS  
**Doyle's, Hall's & Bird's.**  
Are now all merged and are con-  
trolled exclusively by the

**YALE LOCK MFG CO.,**  
**HENRY B. TOWNE, Pres't.**  
STAMFORD, CONN.

**VAN WART & McCOY,**  
New York Agents,  
134 & 136 Duane Street.

**T. A. WESTON, Mechanic**  
Engineer, with the Company.

**BOGARDUS' PATENT UNIVERSAL BOUEN-  
TRIC MILLS.**—For grinding Bones, Ores, Sand, Old  
Crucibles, Fire Clay, Gunpowder, Oil Cake, Feed, Corn,  
Corn and Cob, Tobacco, Snuff, Sugar, Salts, Roots, Spices,  
Coffee, Coconut, Flaxseed, Asbestos, Mica, etc., and  
whatever cannot be ground by other mills. Also for Paints,  
Printers' Ink, Paste Blacking, etc. **JOHN W. THOMSON,**  
successor to **JAMES BOGARDUS,** corner of White and  
Kim Sts., New York.

**Todd & Rafferty Machine Co.**

MANUFACTURERS OF  
The celebrated Greene Variable Cut-Off Engine; Lowe's  
Patent Tubular and Fine Boilers; Plain Slide Valve Sta-  
tionary, Horizontal, and Portable Engines. Builders of all  
kinds, Steam Pumps, Mill Gearing, Shafting, &c. Silk  
Tow Oakum, Bagging, Rope, Flax, and Hemp Machinery.  
Agents for the New Haven Manufacturing Co.'s Machin-  
ery Tools; for Judson's Governors and Stop-Valves;  
Starvevan's Blowers; and Differential Pulley-Blocks.  
WAREHOUSES, 10 BARCLAY STREET, NEW YORK.  
WORKS PATTERSON, NEW JERSEY.

**Water Wheels.**

More than four times as  
many of Jas. Leffel's im-  
proved Double Turbine  
Water wheels in operation  
than any other kind. 34  
sizes made, ranging from  
5x to 36 in. diam., under  
heads from 1 to 10 ft. Suc-  
cessful for every purpose.  
Large new pamphlet, the  
finest ever published, con-  
taining over 50 fine illus-  
trations, sent free to parties  
interested in water power.  
**JAS. LEFFEL & CO.,**  
Springfield, O., & 100 Lib-  
erty St., New York City.

**WHIPPLE'S  
Patent Door Knob.**

Awarded a Bronze Medal at the American Institute Fair  
for 1874. The Judges say: "We consider this method of  
fastening DOOR KNOBS a great improvement over any  
thing yet invented for the purpose, as it obviates the use  
of side screws and washers, and can be regulated to suit  
any thickness of Door." Send for Circular.

**THE PARKER & WHIPPLE COMPANY,**  
West Meriden, Conn., or 97 Chambers St., N. Y.

**H. W. JOHNS' PATENT.**

**ASBESTOS  
MATERIALS.**

Roofing, Heat Conting, and Cement, for repairing  
Roofs. Paints—all colors, ready mixed. Heat Paint.  
Fire Proof Coatings, Boiler and Steam Pipe Cov-  
erings, Steam Packing, Roofing, Shafting and  
Lining Felts, &c.  
All ready for use, and easily applied. Send for Pam-  
phlets, Price Lists, &c.

**H. W. JOHNS, 87 Maiden Lane, N. Y.**  
Patentee and Manufacturer. Established 1858.

**THE IMPROVED  
NIAGARA STEAM PUMP,**  
30 to 50 Feet St. Brooklyn, N. Y.  
Agency at 40 John St., New York.

**Hubbard & Aller,**  
SOLE MANUFACTURERS,  
ENGINES AND BOILERS,  
Pulleys, Shafting and Hangers  
a Specialty.

**SECRETS WONDERS**  
And Mysteries. A 94 page Book, full of peculiar Disclosures  
Illustrated. Sent free to all for 3 postage stamps.  
Address **J. FLETCHER & CO., Williamsburgh, New York**

**TO ELECTRO-PLATERS, JEWELERS,  
AND WATCHMAKERS.**

BATTERIES, CHEMICALS, AND MATERIALS, in  
sets or single, with Books of Instructions for Nickel, Sil-  
ver, and Silver Plating. **THOMAS HALL, Manufac-  
turing Electrician,** 16 Bromfield Street, Boston, Mass.  
Illustrated Catalogue sent free.

**GARDINER'S PATENT  
Centring  
and  
Squaring Attachment,  
FOR LATHES.**

Address,  
**R. E. STATE,**  
SPRINGFIELD, O.

SEND FOR CIRCULAR AND PRICE LIST

THE "Scientific American" is printed with  
**CHAS. ENES JOHNSON & CO.,** 117 N. 7th and  
Lombard Sts., Philadelphia and 2 Gold St., New York



